

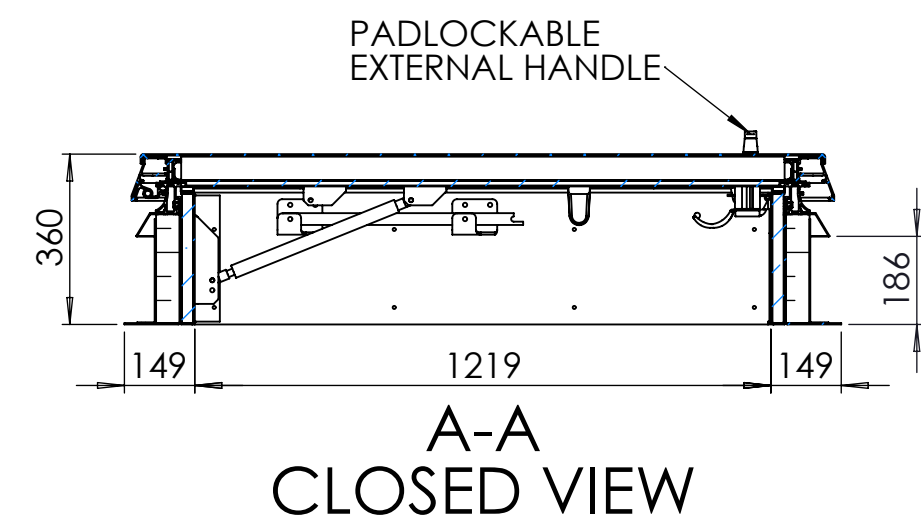
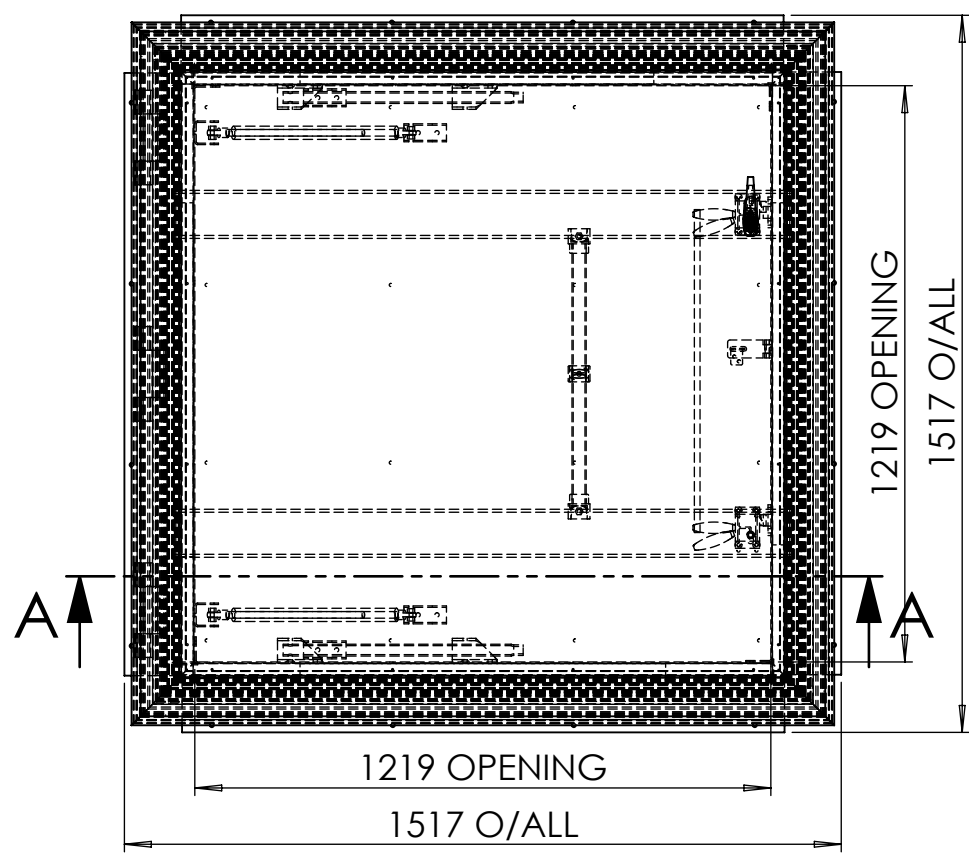


CONFIDENTIAL

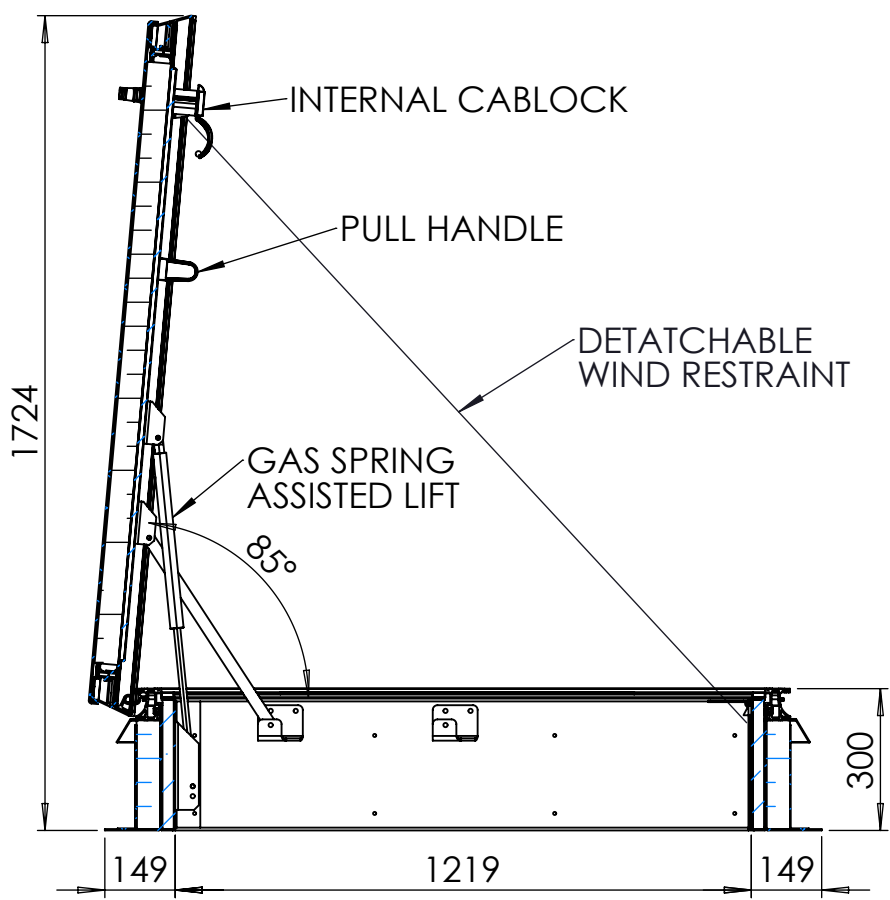

A-A
CLOSED VIEW

SRH-TB-FR 300mm UPSTAND

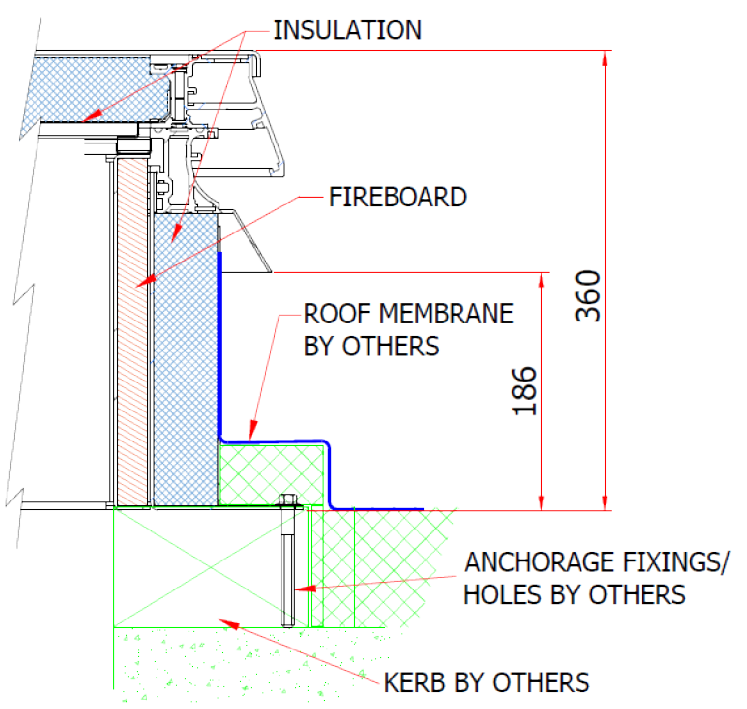


A-A
OPEN VIEW

SRH/TB/FR
UP TO 240 MINUTES FIRE RATED FOR INTEGRITY TO
EN1634-1:2014 AND UL-EU CERTIFIED

SIZE: 1219 X 1219 mm
UPSTAND HEIGHT: 300 mm
LOCKING OPTION: -LO1 (INTERNAL CABLOCK)
**-LO2 (PADLOCKABLE HASP + STAPLE) &
-LO4 (EXTERNAL PADLOCKABLE HANDLE)**
INCLUDED AS STANDARD IF REQUIRED
MATERIAL: EXTERNAL- ALUMINIUM
INTERNAL- GALV STEEL CLAD
INSULATION: 50mm NON-COMBUSTIBLE
MINERAL WOOL (U-VALUE of 0.63W/m²K)

INTERNAL COLOUR: MILL FINISH
EXTERNAL COLOUR: MILL FINISH

APPROX. WEIGHT: 274.3 kg

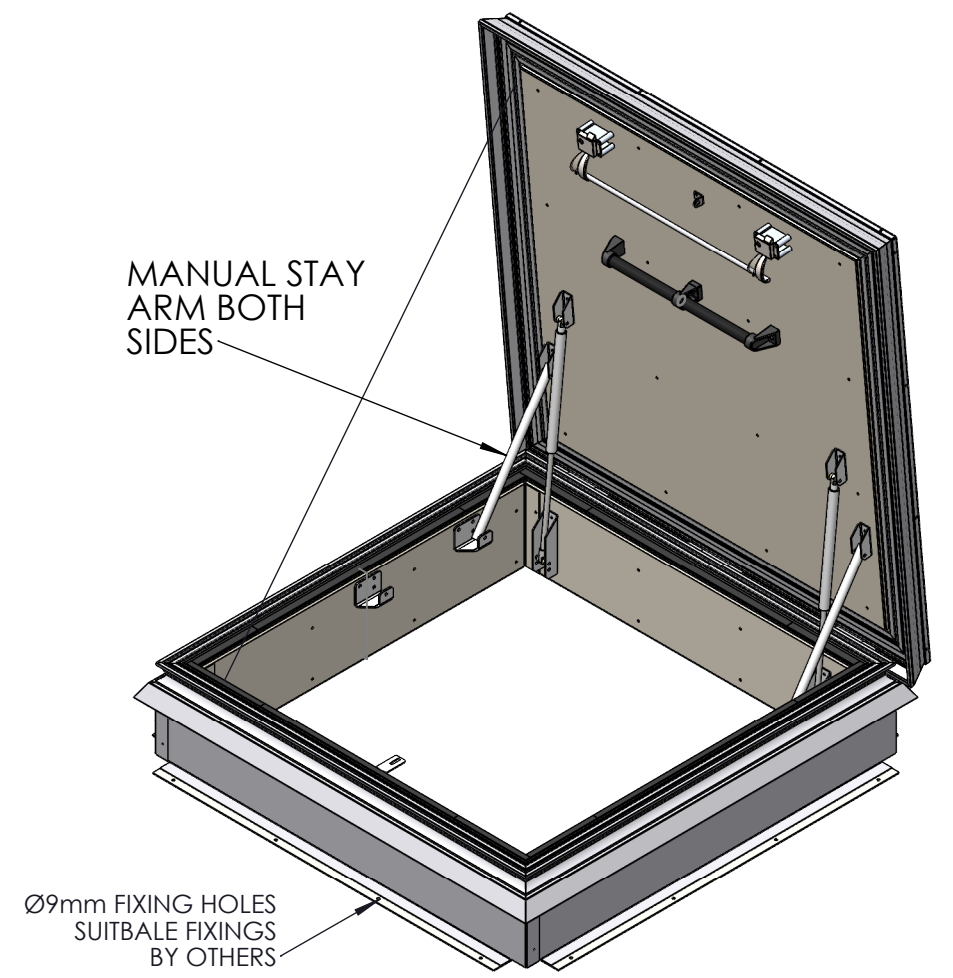

 SURESPAN			DIMENSIONS ARE IN MILLIMETERS U.O.S TOLERANCES: X+/- 2mm, X.X +/- 0.2mm DO NOT SCALE DRAWING - IF IN DOUBT ASK		A3
	NAME	DATE:	TITLE: SRH-TB-FR 1219 X 1219 mm		
DRAWN					
CHECK'D					
APPV'D					
DEBUR AND BREAK SHARP EDGES	MATERIAL: N/A		DWG NO.		SCALE: 1:16
	FINISH:		SRH-TB-FR-1219-1219-01-0001		REVISION: A
	WEIGHT: 274.3 KG		STATUS: Work In Progress		SHEET: 1 of 1

Surespan Limited 2021. All intellectual property rights retained. This drawing and its contents are the property of Surespan Limited and must not be disclosed in part or wholly to any third-party without the written permission of Surespan Limited

The article shown is also the subject of:
Patent rights
Registered design right
Unregistered rights
The drawing is a design document
Patent pending