



CONFIDENTIAL

DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED - IF IN DOUBT ASK

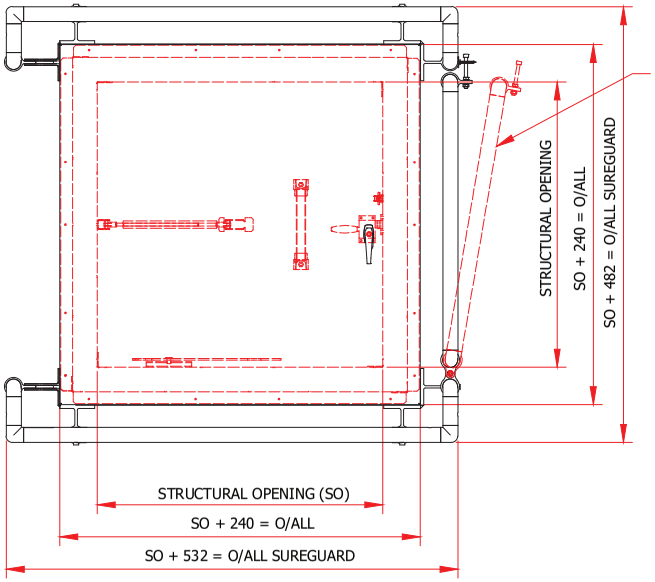


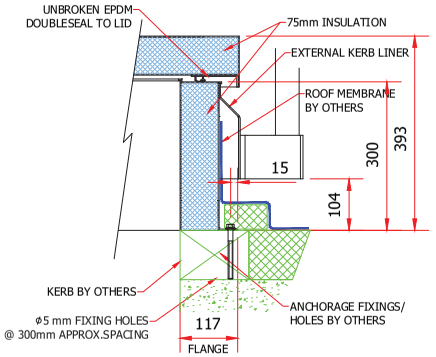

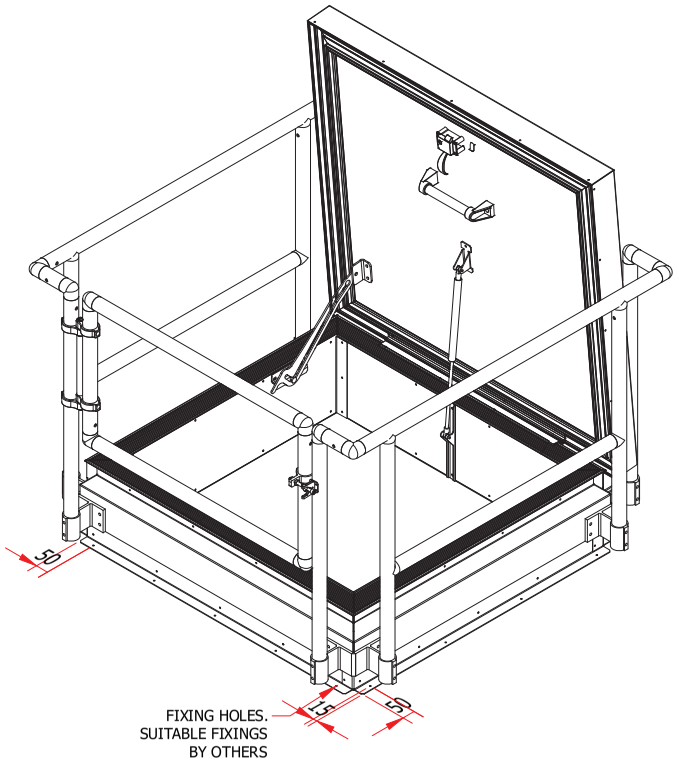

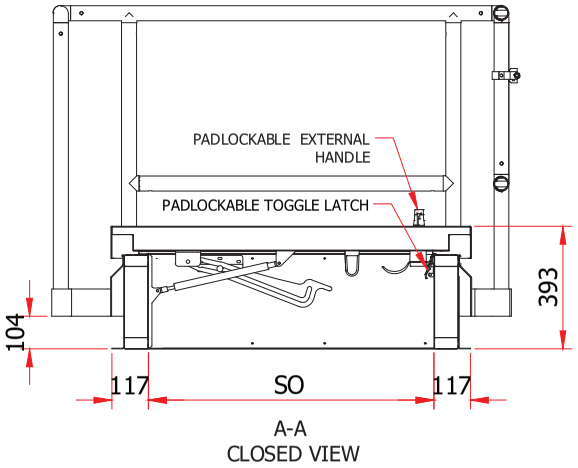

A-A
CLOSED VIEW

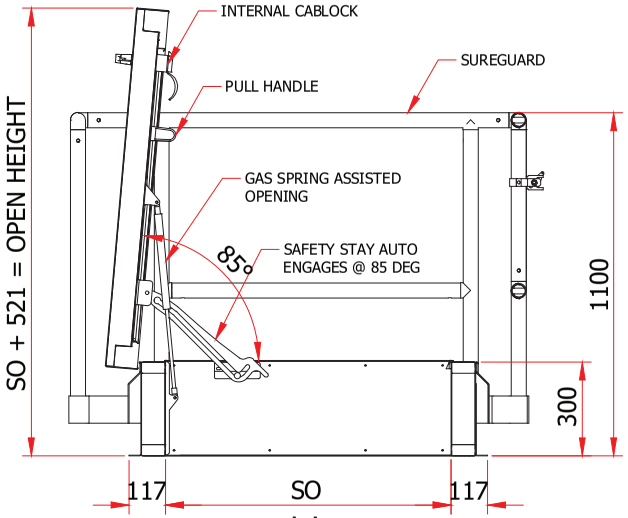

A-A
OPEN VIEW

SRHP75 + SUREGUARD
SIZE: 915 X 915 mm
UPSTAND HEIGHT: 300 mm
LOCKING OPTION: LO1 (INTERNAL CABLOCK) / LO2 (PADLOCKABLE TOGGLE LATCH) / LO4 (EXTERNAL PADLOCKABLE HANDLE)

MATERIAL: ALUMINIUM
INSULATION: 75 mm INSULATION (U-Value of 0.26W/m²K)

QUANTITY: 1 No. REQD

HATCH INTERNAL FINISH: MILL FINISH
SUREGUARD & HATCH EXTERNAL FINISH : MILL FINISH

APPROX WEIGHT: 90 Kg

LASER CUT	
PUNCH PRESS	
FOLDING	
DRILLING	
WELDING	
ASSEMBLY	
POWDER COAT	

DRAWING MADE BY CAD
MANUAL CHANGES PROHIBITED

Copyright is claimed in this drawing and no copy may be made without prior written permission.

C

The article shown is also the subject of:

- patent rights
- registered design rights
- unregistered rights
- this drawing is a design document
- patent pending

WIND RESTRAINTS SHOULD BE SPECIFIED ON ALL ACCESS HATCHES SUBJECT TO HIGH WIND CONDITIONS
THIS IS AN ELLECTRICALLY OPERATED ACCESS HATCH/COVER & IT IS ESSENTIAL THAT SAFE MEANS OF ACCESS IS PROVIDED FOR THE OPERATOR

SURESPAN

Designed by	Checked by	Client	Project	Date
SM				03.12.2020

EXISTING LAW PROTECTS SURESPAN'S RIGHT OF POSSESSION TO THIS DRAWING. THE DESIGN OR THE DRAWING MUST NOT, WITHOUT PERMISSION OF THE COMPANY, BE PUBLISHED, COPIED, REPRODUCED MANUFACTURED OR EXPLOITED IN ANY OTHER UNAUTHORIZED WAY

SRHPE/75 915 x 915 mm + SUREGUARD & REMOVABLE LIFTING EYES

Revision	Sheet
	1 / 29