SURESPAN

SPECIFICATION SHEET
S.MD.BF/FR60/120

2hr in a Wall. 1 hr in a Ceiling

2 HR FIRE RATED METAL ACCESS PANEL





TECHNICAL SPECIFICATION

DESCRIPTION	Metal Door- Concealed Beaded Frame
FIRE RATED	1 or 2 hour fire resistance for integrity to BSEN 1634-1:2008 and BSEN 1363-1:1988
HINGED TYPE	Continuous Hinge
COMPOSITION	Removable Flush Metal Faced Door. 1.2mm Thick Zintec Steel Frame. 1.0mm Thick Zintec Steel Door Tray. Polyester Powder Coated in matt white RAL 9010 20% gloss
FRAME TYPE	Perforated Frame for taping and skimming on site.
FITTING	Screw fix through the frame into a suitable trimming.
LOCKING	3-way locking system

DIMENSIONS

On installation the structural opening to fit the panel must be 5 mm larger than the panel size.

SIZES		STRUCTURAL OPENING		CLEAR OPENING with door removed	
(X)	(Y)	(X)	(Y)	(X)	(Y)
300	300	305	305	276	276
450	450	450	455	426	426
550	550	550	555	526	526
600	600	600	605	576	576
600	900	600	905	576	876
600	1200	600	1205	576	1176


Bespoke sizes are also available

LOCKING OPTIONS



THREE-WAY LOCKING

TECHNICAL DRAWING

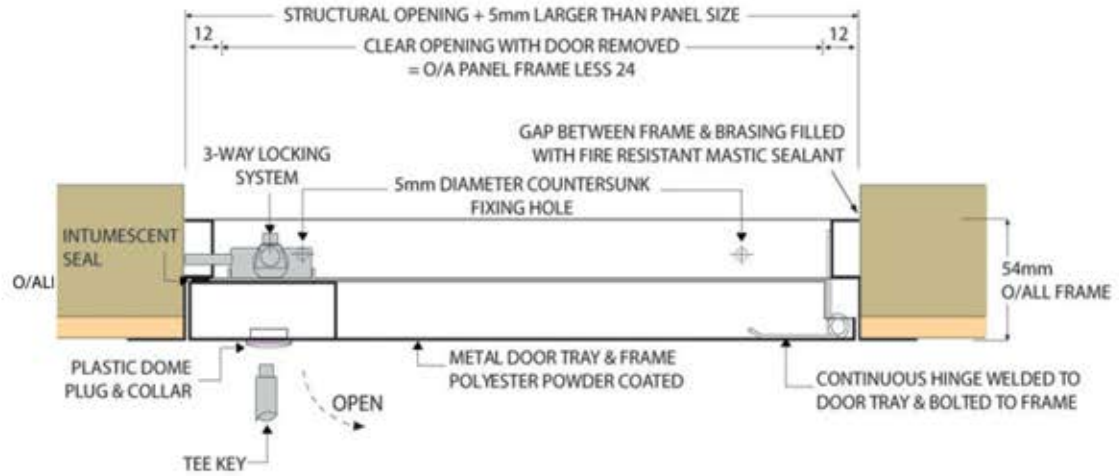

surespancovers.com
Leamore Close | Leamore Industrial Estate | Walsall | West Midlands | WS2 7NL | England
sales@surespancovers.com | +44 (0) 1922 711185