SURESPAN

SPECIFICATION SHEET
S.MD.BF

Metal Faced Panel With Concealed Beaded Frame

CEILING/WALL ACCESS PANEL



TECHNICAL SPECIFICATION

DESCRIPTION	Metal Door - Concealed Beaded Frame
FIRE RATED	Non Fire - Rated, made from wholly non-combustible materials.
HINGED TYPE	Continuous Hinge.
COMPOSITION	Removable Flush Metal Faced Door. 1.2mm Thick Zintec Steel Perforated Frame. 1.0mm Thick Zintec Steel Door Tray. Polyester Powder Coated in matt white RAL 9010 20% gloss.
FRAME TYPE	Concealed Beaded frame for taping and skimming on site
FITTING	Screw fix through the frame into a suitable trimming.
LOCKING	Budget Lock

DIMENSIONS

On installation the structural opening to fit the panel must be 5 mm larger than the panel size.

SIZES		STRUCTURAL OPENING		CLEAR OPENING with door removed	
(X)	(Y)	(X)	(Y)	(X)	(Y)
300	300	305	305	276	276
450	450	455	455	426	426
550	550	555	555	526	526
600	600	605	605	576	576
600	900	605	905	576	876
600	1200	605	1205	576	1176

Bespoke sizes are also available


LOCKING OPTIONS



Budget Lock

For other Locking Options, please get in contact.

TECHNICAL DRAWING

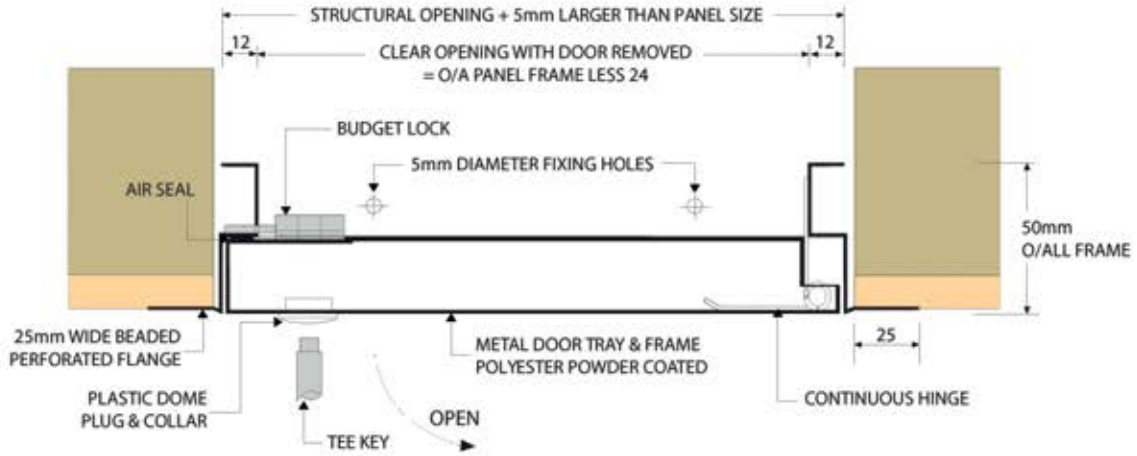

surespancovers.com
Leamore Close | Leamore Industrial Estate | Walsall | West Midlands | WS2 7NL | England
sales@surespancovers.com | +44 (0) 1922 711185