SURESPAN

SPECIFICATION SHEET
S.PB.BF/FR60/120

Plasterboard Face with Beaded Frame

2 HOUR FIRED RATED ACCESS PANEL





TECHNICAL SPECIFICATION

DESCRIPTION	Plasterboard Faced - Concealed Beaded Frame.
FIRE RATED	1 or 2 hour fire resistance for integrity to BSEN 1634-1:2008 and BSEN 1363-1:1988
HINGED TYPE	Panel Hinge
COMPOSITION	Flush Plasterboard infill Faced Door. 1.2mm Thick Zintec Steel Perforated Frame and Steel Door Tray with Plasterboard Infill. Polyester Powder Coated in matt white RAL 9010 20% gloss.
FRAME TYPE	Perforated Frame for taping and skimming on site
FITTING	Screw fix through the frame into a suitable trimming.
LOCKING	3-way locking system

DIMENSIONS

On installation the structural opening to fit the panel must be 5 mm larger than the panel size.

SIZES		STRUCTURAL OPENING		CLEAR OPENING with door removed	
(X)	(Y)	(X)	(Y)	(X)	(Y)
300	300	305	305	270	270
450	450	455	455	420	420
550	550	555	555	520	520
600	600	605	605	570	570
600	900	605	905	570	870
600	1200	605	1205	570	1170


Bespoke sizes are also available

LOCKING OPTIONS



THREE-WAY LOCKING

TECHNICAL DRAWING

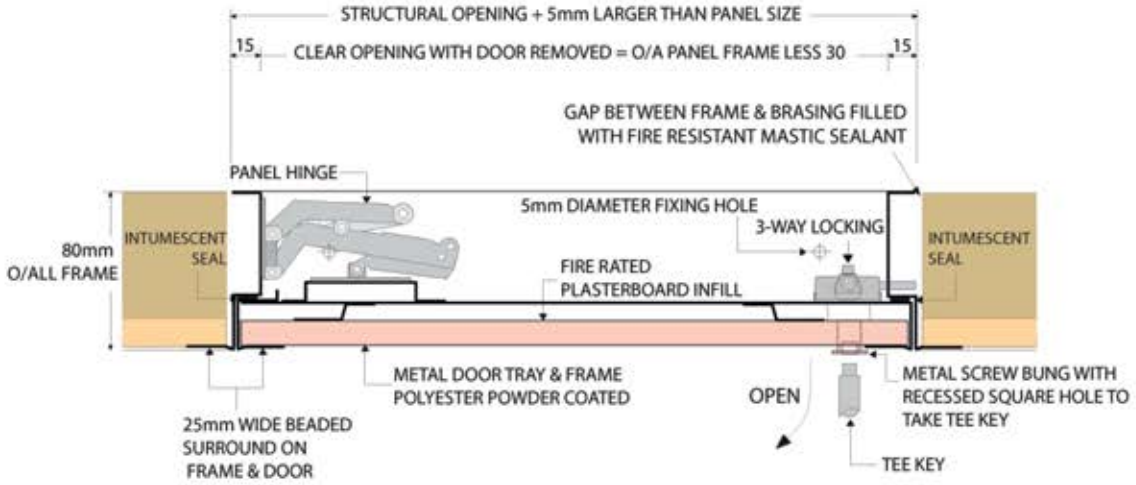

surespancovers.com
Leamore Close | Leamore Industrial Estate | Walsall | West Midlands | WS2 7NL | England
sales@surespancovers.com | +44 (0) 1922 711185