ZIP8M-FR60
RETRACTABLE LADDER
DATA SHEET



Features

- Certified 60 Minutes Fire Rated from below
- Deep and wide anti-slip treads
- Counterbalance spring action
- Mounted to a wooden trap ceiling door
- Maximum loading 150kg/tread
- Floor to Ceiling Height up to 2750mm
- One side telescopic handrail

Specification

Material

Die cast aluminium alloy with insulated wooden trapdoor.
Aluminium non-slip treads

Operation

Counter balanced springs are incorporated into the pivot bracket for easy opening. Spring latch locked with operating pole.

Trap Door

The draught proofed timber hatch is coated white inside and out.
Opening Length from 1000 - 1400mm*
Opening Width from 550 - 800mm*
* Depending on floor to ceiling height
Air Permeability Class 4 Certified

Lining

The timber surround is 16mm thick between 220mm and 800mm high.

Treads

Standard tread width is between 280 and 330mm by 80mm depth. Alternate sizes are also available upon request.


Loading

150kg per tread.

Fire Rated

Available 60 minutes fire rated from below only. Installation in wooden beam ceilings >197mm or concrete ceilings >150mm

Floor to Ceiling Height	No. of Treads	Casing Length	Casing Width
up to 2500mm	9 Treads	800 - 1600mm	745 - 1200mm
2500 - 2790mm	10 Treads	800 - 1600mm	745 - 1200mm
2791 - 3090mm	11 Treads	900 - 1600mm	745 - 1200mm
3091 - 3390mm	12 Treads	1000 - 1600mm	745 - 1200mm
3391 - 3690mm	13 Treads	1300 - 1600mm	745 - 1200mm
3691 - 3990mm	14 Treads	1400 - 1600mm	745 - 1200mm
3991 - 4300mm	15 Treads	1500 - 1600mm	745 - 1200mm
4301 - 4600mm	16 Treads	1600mm	800 - 1200mm

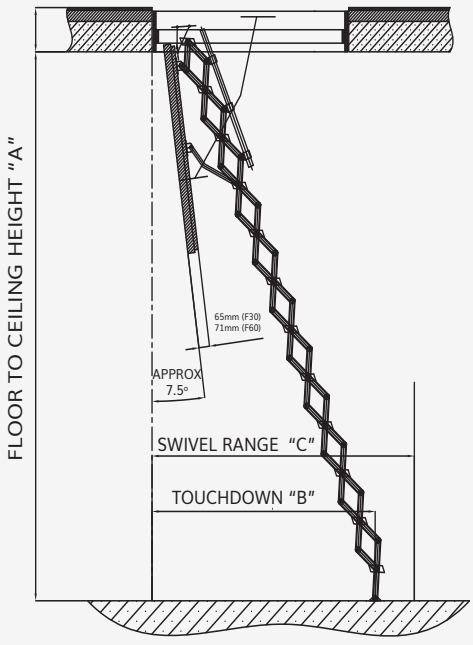

Leamore Enterprise Park, Leamore Close
Walsall, WS2 7NL, West Midlands

T: +44 (0)1922 711185
F: +44 (0)1922 714099
E: sales@surespancovers.com

REV 1.0 - RF - 07/22