

CONFIDENTIAL

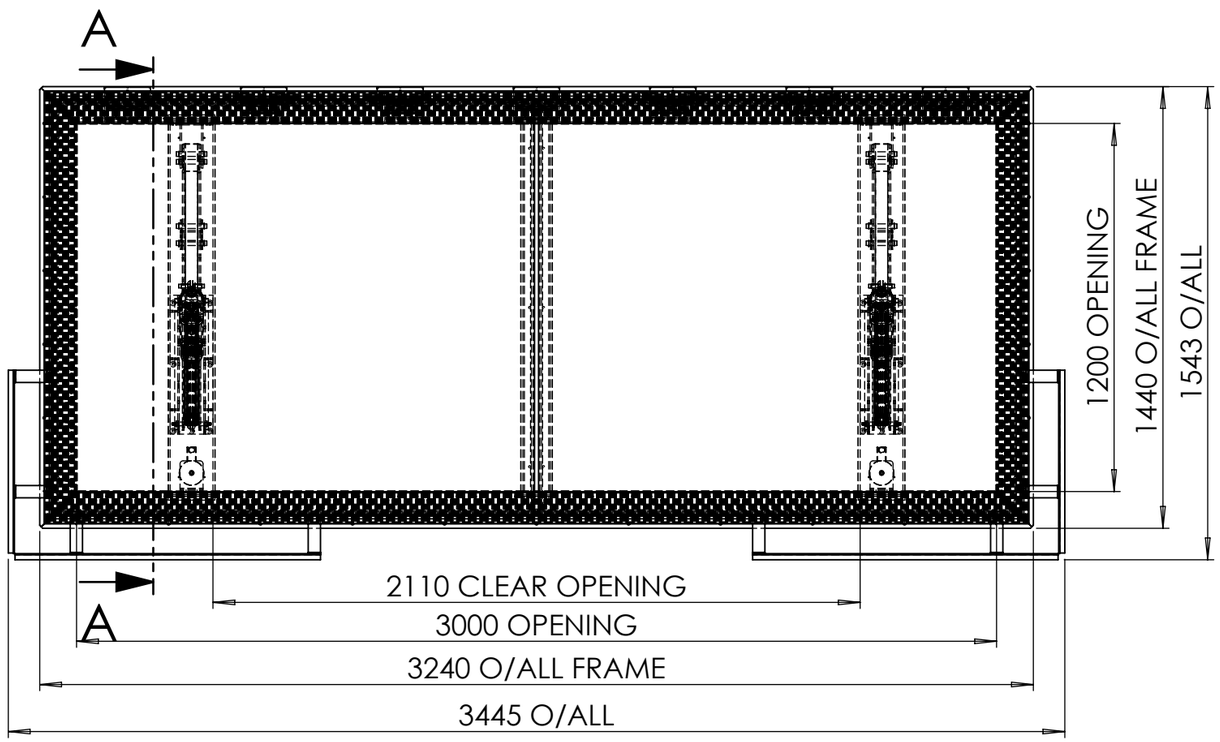


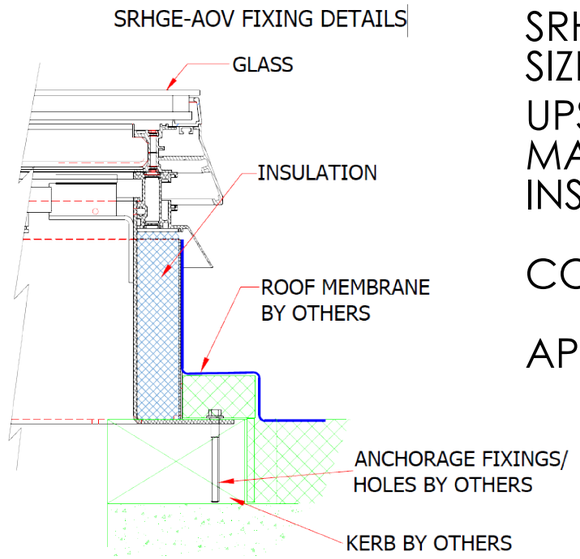


SRHGE-AOV
SIZE: 3000 X 1200
UPSTAND HEIGHT: 300
MATERIAL: ALUMINIUM
INSULATION: 50mm INSULATION

COLOUR: (MILL FINISH/PPC)


APPROX. WEIGHT: 396.8 kg

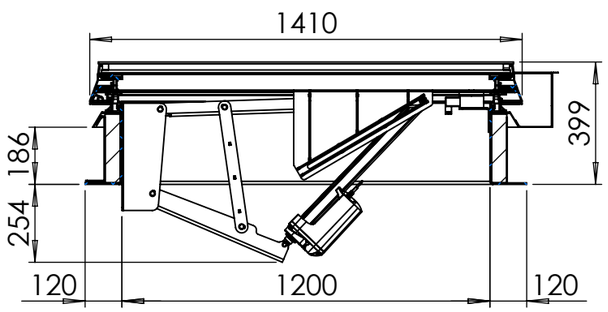

A-A
CLOSED VIEW

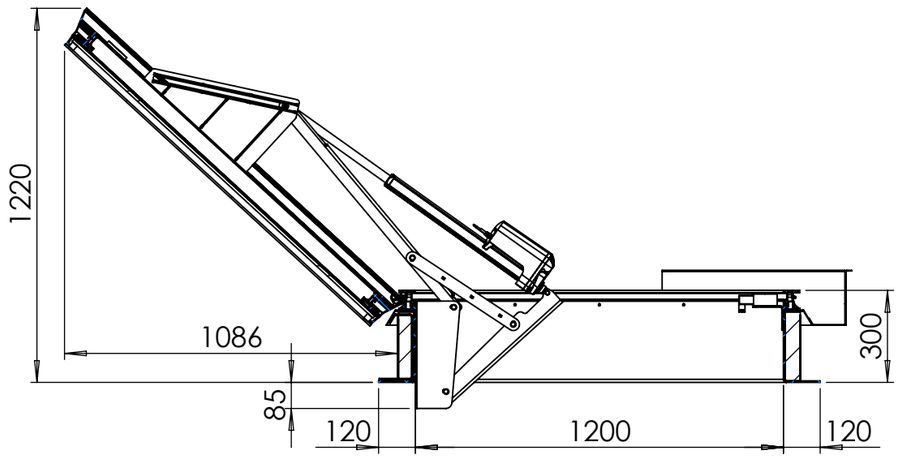

A-A
OPEN VIEW

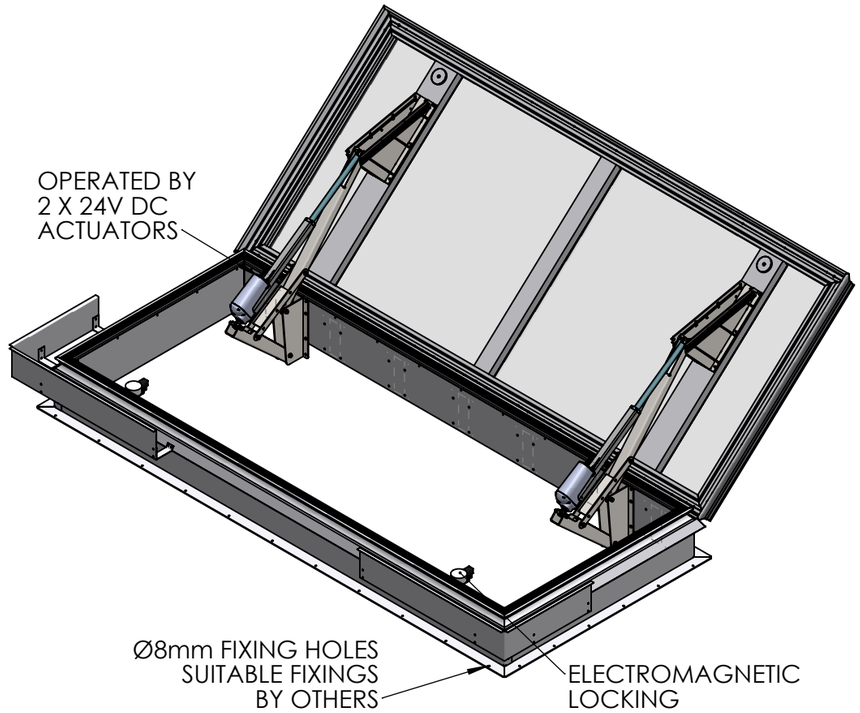

Surepan Limited 2021. All intellectual property rights retained. This drawing and its contents are the property of Surespan Limited and must not be disclosed in part or wholley to any thir-party without the written permission of Surepan Limited

The article shown is also the subject of:
Patent rights
Registered design right
Unregistered rights
The drawing is a design document
Patent pending

TYPICAL GLASS SPECIFICATION:
35.5mm SEALED DOUBLE GLAZED UNIT COMPRISES OF:
6mm PILKINGTON TOUGHENEND K POLISHED ALL ROUND OUTER PANE,
20mm WARM EDGE SILVER SPACER BAR ARGON FILLED,
9.5mm PILKINGTON TOUGHENEND & LAMINATED INNER PANE,
U-VALUE OF 1.5W/m²K

SURESPAN

DIMENSIONS ARE IN MILLIMETERS U.O.S
TOLERANCES: X+/- 2mm, X.X +/- 0.2mm
DO NOT SCALE DRAWING - IF IN DOUBT ASK

A3

	NAME	DATE:
DRAWN		
CHECK'D		
APPV'D		

TITLE: SRHGE-AOV 3000 X 1200 mm

DEBUR AND BREAK SHARP EDGES

MATERIAL: N/A
FINISH:
WEIGHT: 396.8 KG

DWG NO. SRHGE-AOV-3000-1200-01-1001

SCALE: 1:20
REVISION: A
STATUS:
SHEET: 1 of 1