Aero Pyramid

Product Data Sheet

A sleek high performance 30 degree lantern offering maximum ventilation at a touch of a button

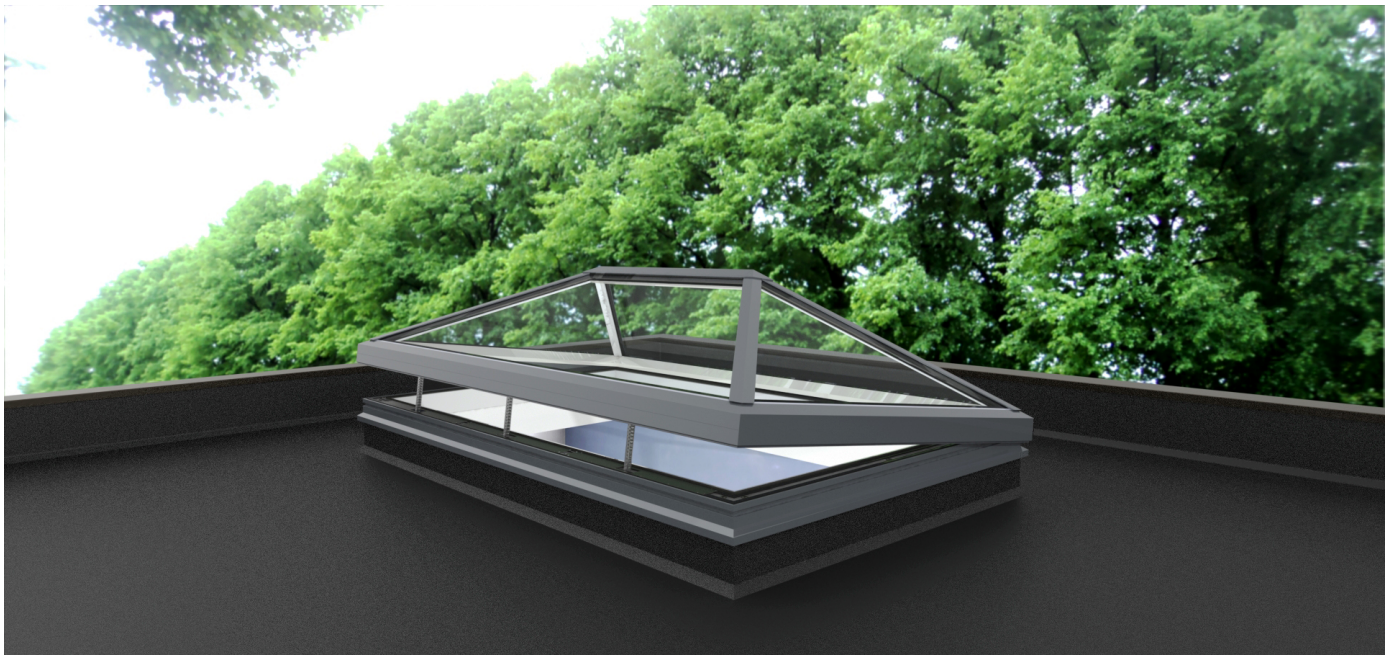

Available as a square and elongated

Features

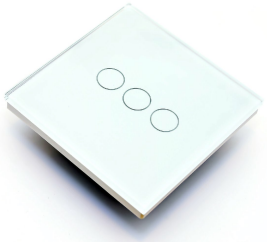

- Electrically opening to 250mm high
- Five part, thermal broken base frame and glazed lid
- Integrated hinge with polymer bearings
- 24V with plug and play control box
- Touch wall switch and remote control as standard
- Laminated safety inner pane with UV filter
- Double run of EDPM gaskets creating an airtight seal
- Weatherproof drip detail
- Decorstop detail for integrating plasterboard.

plug & play

Dimensions (structural opening sizes)	Drawing Number	Minimum Width	Maximum Width	Minimum Length	Maximum Length
Square	**STD- 1505**	**800mm**	**1200mm**	**800mm**	**1200mm**
Elongated (single pane on the length)	**STD - 1506**	**800mm**	**1200mm**	**900mm**	**2300mm**

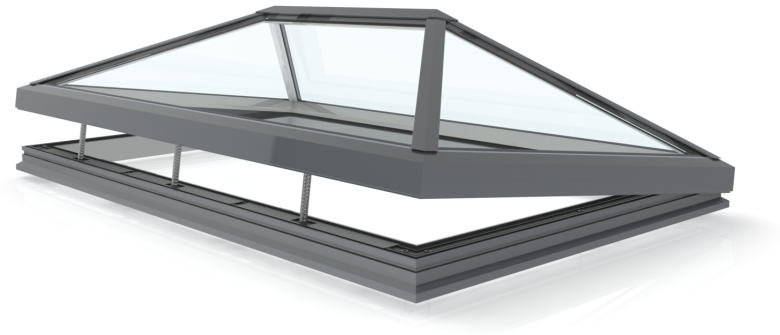

Frame Specification

5-Part extruded aluminium profile with 3 Polyamide thermal breaks.

Polyester powder coated (semi-gloss) either RAL 7015 (Slate Grey) or RAL 9005 (Black) externally, and RAL 9010 (White) internally.

Standard Glass Specification (Enhanced)

6mm toughened soft coat low E outer pane, 14mm Argon filled silicone sealed cavity with a black warm edge spacer bar. 8.8mm laminated safety inner pane (with a UV filter).

Downloads

- CAD details
- O&M Manuals
- Installation Manuals

Thermal performance certificates available on request

Glazing Options

- Low maintenance
- Solar Control options
- TN92 compliant solutions

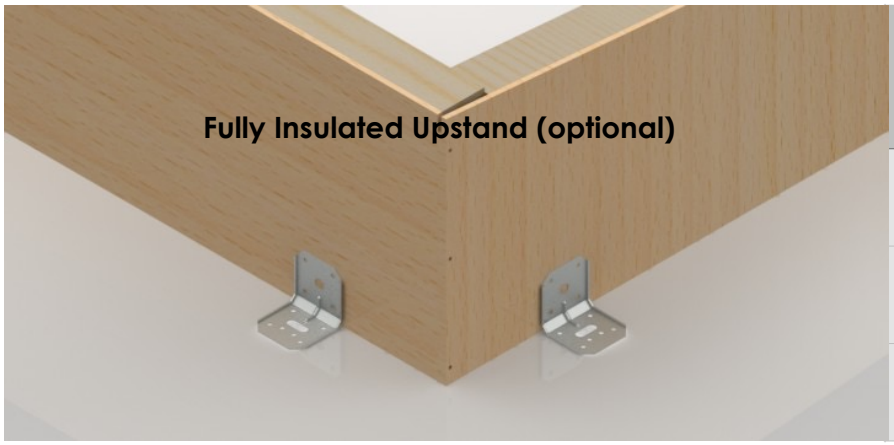

Upstand Dimensions*	Minimum	Maximum
Height	150mm	600mm
Width	75mm	75mm
Pitch	Level	Level

Designed & Assembled in Suffolk, England

Sunsquare Limited
Kempson Way
Bury St Edmunds
Suffolk IP32 7AR
01284 723377
sunsquare.co.uk

bsi. ISO 9001 Quality Management FM 597286
ISO 14001 Environmental Management EMS 644865
bsi. Rooflights KITEMARK™ KM 619677 PP 519