Data Sheet
SP1322-C Fire Breakglass

SURESPAN®
Manufacturers of Access Products
Leamore Close · Leamore Enterprise Park · Walsall
West Midlands · WS2 7NL · England
Telephone: +44 (0)1922 711185 · Fax: +44 (0)1922 497943
Email: sales@surespancovers.com
www.surespancovers.com
www.jakdor.co.uk

Weather rating:	Suitable for internal use only IP40 *-20°C to +60°C*
Security:	N/A
Mounting:	Surface mounted
Material:	Plastic Enclosure (Orange / Grey)
Dimensions:	125mm x 125mm x 36mm

Please note: fixings are not supplied with this unit

Fitting detail:

Cable Connection – the panel mounted resistor should be removed from the control panel. In addition the units are factory set but if using multiple switches the jumper should be changed as per the instructions in the full control manual booklet.

Operation:
Break glass and press Red Fire Button, or open case and operate button. To close vent open case and press black reset button.

LED Indicators
Green – Illuminates on hatch closing
Yellow – Illuminates on control panel error – check main control panel
Red – Illuminates on hatch opening on fire
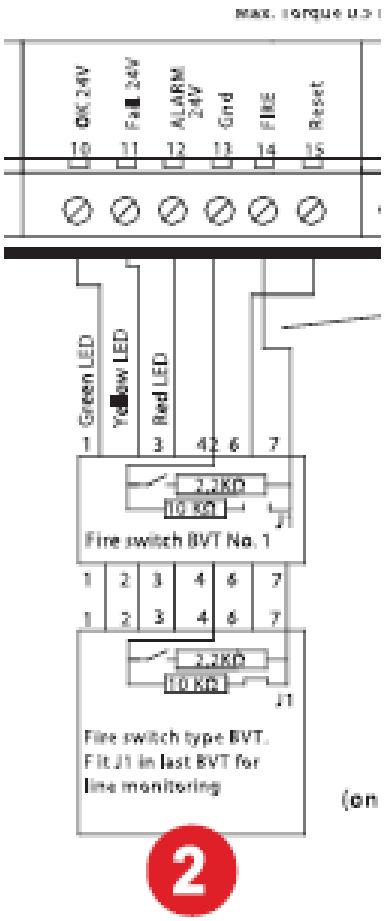
Connection Diagram – please refer to control panel booklet for more information on connection.