ZIP4-7
RETRACTABLE LADDER
DATA SHEET

Features

- Deep and wide anti-slip treads
- Heavy duty Counterbalance springs
- Mounted to 18mm backboard
- 200kg per tread / Overall unit 500kg/m²
- Certified to EN14975
- Treads 350mm wide x 140mm deep
- Tread rise between 277 - 280mm

Specification

Material

Die cast Aluminium alloy and Aluminium non-slip treads.

Operation

Heavy-duty counterbalanced springs incorporated within pivot brackets.

Head Board

Mounted to 18mm timber backboard. 80mm spacer required on install.

Loading

200Kg per tread. 500kg/m² overall structure.

Tread Rise

Typical tread rise 277-280mm
(subject to floor-to-ceiling height).

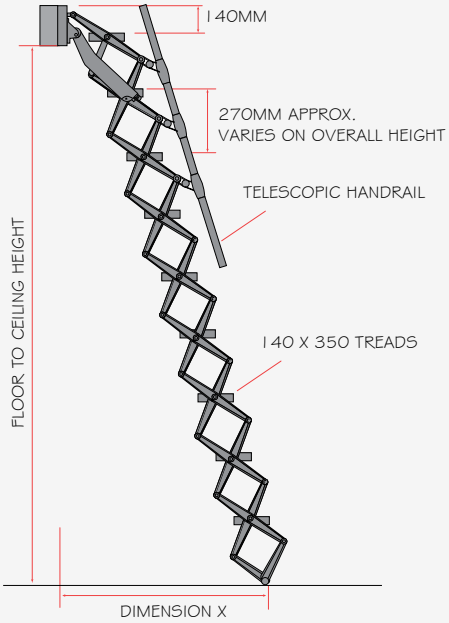

Model	Headboard	Min Aperture	Dimension X	No. Of Treads	Tread Widths	Weights
ZIP 4	UP TO 2500	600 X 900	1210 - 1310	9	575	28kg
ZIP 5	2501 - 2790	600 X 900	1310 - 1410	10	575	30kg
ZIP 6	2791 - 3090	600 X 900	1410 - 1510	11	575	32kg
ZIP 7	3091 - 3390	600 X 900	1510 - 1610	12	525	34kg

Note: Add 50mm to minimum aperture width to allow frame thickness of Jakdor ceiling door.
It's up to the customer to ensure the aperture size is large enough for their requirements.

Leamore Close, Leamore Enterprise Park,
Walsall, WS2 7NL, West Midlands

T: +44 (0)1922 711185
F: +44 (0)1922 714099
E: sales@surespancovers.com

REV 2.0 - RFCH - 06/21

ZIP4-7
RETRACTABLE LADDER
DATA SHEET

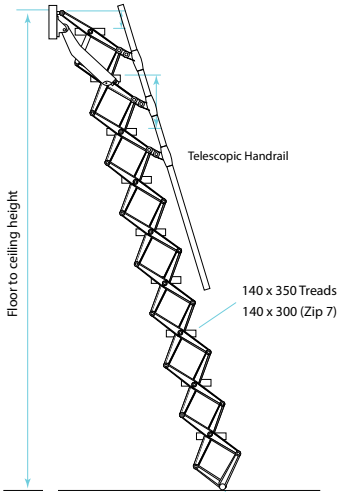



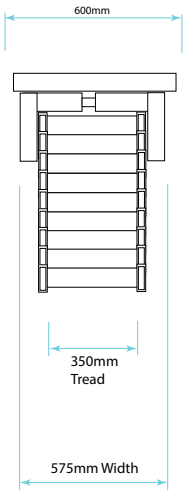

Options

- **SRHP75**

- **Extended Liner**

- **Jakdor Ceiling Panels**

- **Wall Mounted Ladder**

Ladder Arrangements

- **ZIP Retractable Ladders**

[Hatch + Backboard + ZIP]

[Hatch + Wall Tread + ZIP]

[Hatch + Tread + ZIP8]

Leamore Close, Leamore Enterprise Park,
Walsall, WS2 7NL, West Midlands

T: +44 (0)1922 711185
F: +44 (0)1922 714099
E: sales@surespancovers.com

REV 2.0 - RFCH - 06/21