CONFIDENTIAL

DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED - IF IN DOUBT ASK

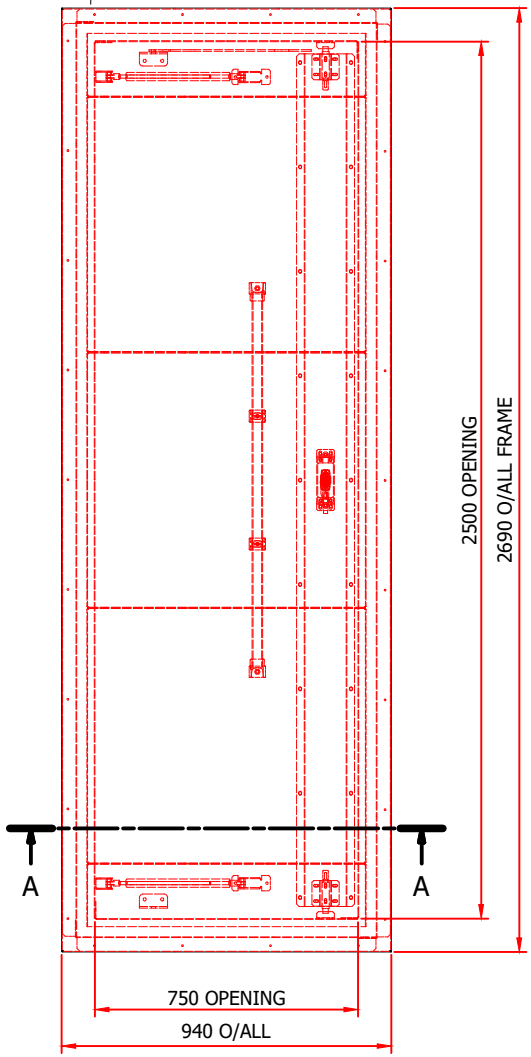

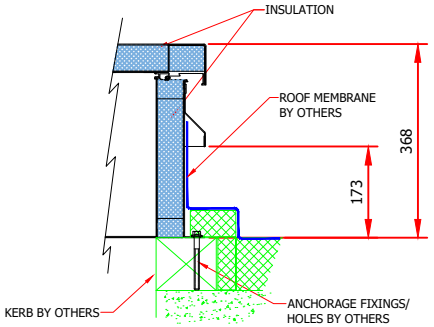

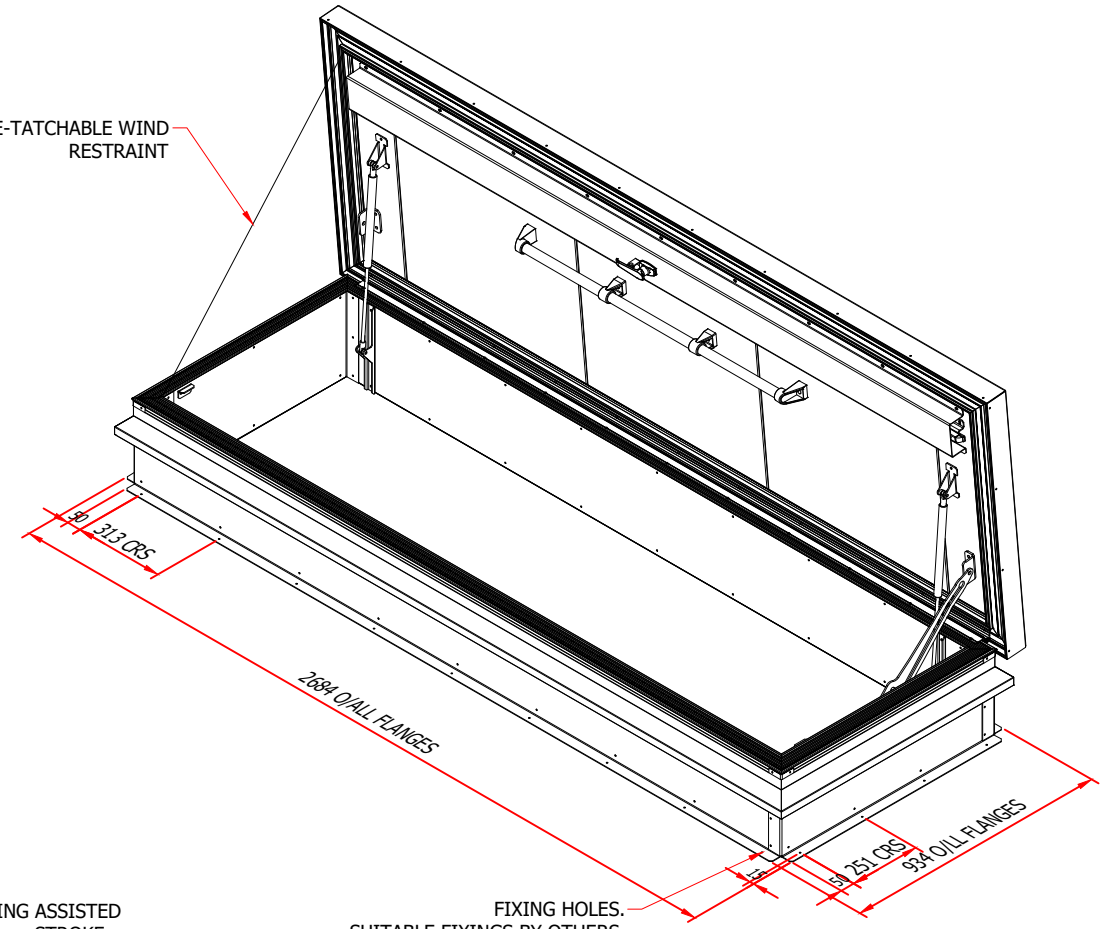

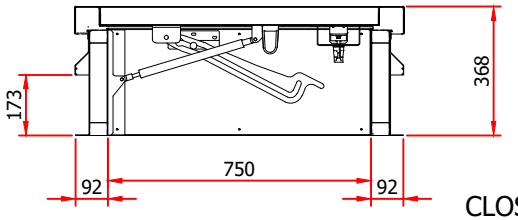

A-A
CLOSED VIEW

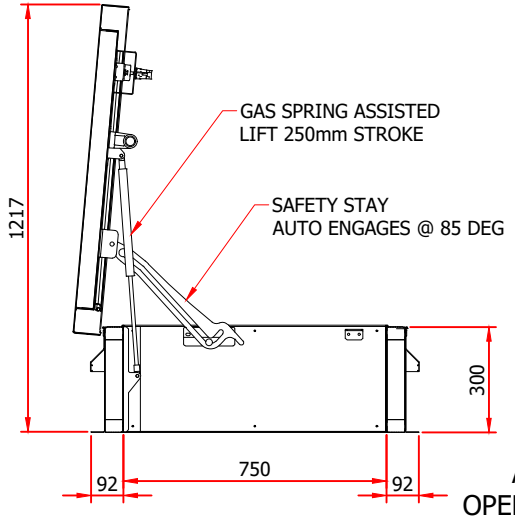

A-A
OPEN VIEW

SRHP 2Way Lock Double Gas Spring
SIZE: 2500 X 750
UPSTAND HEIGHT: 300
LOCKING OPTION: LO1
MATERIAL: ALUMINIUM
INSULATION: 50mm POLYISOCYANURATE
OR NON-COMBUSTABLE MINERAL WOOL

QUANTITY: 1 No. REQD

INTERNAL COLOUR: MILL FINISH
EXTERNAL COLOUR: MILL FINISH

APPROX WEIGHT: 98 kg

DRAWING MADE BY CAD
MANUAL CHANGES PROHIBITED

LASER CUT	
PUNCH PRESS	
FOLDING	
DRILLING	
WELDING	
ASSEMBLY	
POWDER COAT	

Copyright is claimed in this drawing and no copy may be made without prior written permission.

C

The article shown is also the subject of:

- patent rights
- registered design rights
- unregistered rights
- this drawing is a design document
- patent pending

WIND RESTRAINTS SHOULD BE SPECIFIED ON ALL ACCESS HATCHES SUBJECT TO HIGH WIND CONDITIONS
THIS IS A MANUALLY OPERATED ACCESS HATCH/COVER & IT IS ESSENTIAL THAT SAFE MEANS OF ACCESS IS PROVIDED FOR THE OPERATOR

SURESPAN

Designed by	Checked by	Client	Project	Date
EO				27.01.2020

EXISTING LAW PROTECTS SURESPAN'S RIGHT OF POSSESSION TO THIS DRAWING. THE DESIGN OR THE DRAWING MUST NOT, WITHOUT PERMISSION OF THE COMPANY, BE PUBLISHED, COPIED, REPRODUCED MANUFACTURED OR EXPLOITED IN ANY OTHER UNAUTHORIZED WAY

SRHP TWO WAY LOCK DOUBLE GAS SPRING 2500 X 750 mm

Revision	Sheet
A	/ 22