



Loading Capacity: 125 kN test load (per EN124)

Materials: Frame and cover sections in extruded aluminium. Stainless steel screws. Fire protection panel on stainless steel Z-brackets, EPDM seal and fire resistant seal.


Features: Sealed access cover in high-quality finish. Covers suitable where a look of elegance is required. Easy to open robust cover.

Fire Test Certificate: Certificate issued by the Institute for Fire Protection Technology and Safety Research (IBS) confirms that Type SBVA-F120 resists a fire for 120 minutes and this significantly contributes to safety in the event of a fire.

Lift Open System: SureCover SBVA-F120 comes with a set of lifting keys and precise installation instructions. Jammed covers are released by simply turning the Brass Key provided.

Applications: Inside buildings where a fire-resistant finished is required.

Installation: Installation must be carried out according to instructions. With water-tight models, care must be taken to seal the outer frame into the surrounding flooring and to fill the cover with water-tight concrete.

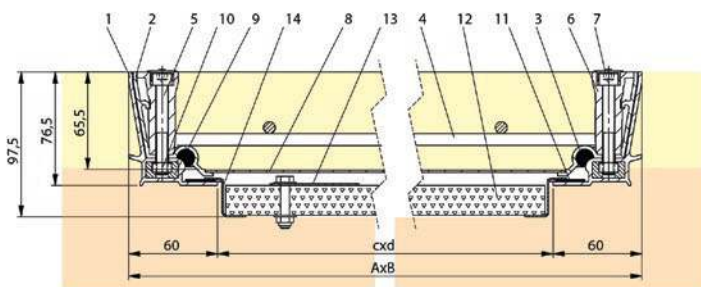

- | | |
|-------------------|---|
| 1 Frame | 8 Base Plate Aluminium |
| 2 Cover | 9 Injection-moulded part |
| 3 Seal | 10 Square nut (stainless steel) |
| 4 Reinforcement | 11 Fire Protection Strip |
| 5 Allen Screw | 12 Fire protection plate |
| 6 Die-cast Corner | 13 Lifting Handle for fire protection plate |
| 7 Plastic Cap | 14 Stainless steel Z-bracket for fire plate |

Product Reference	Clear Opening (mm)		Outside Dimensions (mm)		Weight (Kg)
	c	d	A	B	
SBVA-F120 22	200	X 200	320	X 320	4
SBVA-F120 33	300	X 300	420	X 420	7
SBVA-F120 44	400	X 400	520	X 520	11
SBVA-F120 45	450	X 450	570	X 570	12
SBVA-F120 55	500	X 500	620	X 620	14
SBVA-F120 64	600	X 600	720	X 520	14
SBVA-F120 66	600	X 600	720	X 720	17
SBVA-F120 635	635	X 635	755	X 755	18
SBVA-F120 77	700	X 700	820	X 820	21
SBVA-F120 86	800	X 600	920	X 720	21
SBVA-F120 88	800	X 800	920	X 920	26
SBVA-F120 106	1000	X 600	1120	X 720	26
SBVA-F120 108	1000	X 800	1120	X 920	34
SBVA-F120 110	1000	X 1000	1120	X 1120	39