



Loading Capacity: 15 kN test load (per EN124)

Materials: Frame in extruded aluminium. Cover in extruded aluminium bonded to a composite aluminium honeycomb panel (with a white coating). Stainless steel screw connections. EPDM seal. High-quality gas-lift struts.

Features: Modern lightweight-construction access cover with maximum ease of opening. Major weight-savings compared to concrete-filled access covers. Extremely easy to open thanks to gas-lift struts. A safety device is fitted, locking the cover in the raised position. As the cover is not filled with concrete, installation is quicker and simpler. There is a recess of 24mm for laying slabs, tiles, parquet etc. In the case of thin tiles, the difference in height can be compensated for by using a suitable tile adhesive (MAPEI Keralastic) and waterproof building board. Sealed design with a very high-quality finish. Inconspicuous corner joints make it easy to connect tiles, slabs etc

Lift Open System: SureCover SCCA - GD comes with a set of lifting keys and precise installation instructions. Jammed covers are released by simply turning the Brass Key provided.

Applications: As a cover inside buildings which can be opened by one person.

Installation: Installation should be carried out according to our installation instructions. In the case of water tight covers, care must be taken to seal the outer frame into the surrounding floor. Attach slabs or tiles fully (over the whole surface) with a suitable tile adhesive (MAPEI Keralastic). In the case of thin tiles or slabs, use waterproof building board to compensate for the difference in height.




Detailed view of the safety device and gas-lift struts

Easy to open thanks to light weight construction and gas-lift struts



Web Link:

<https://surespancovers.com/surecover>

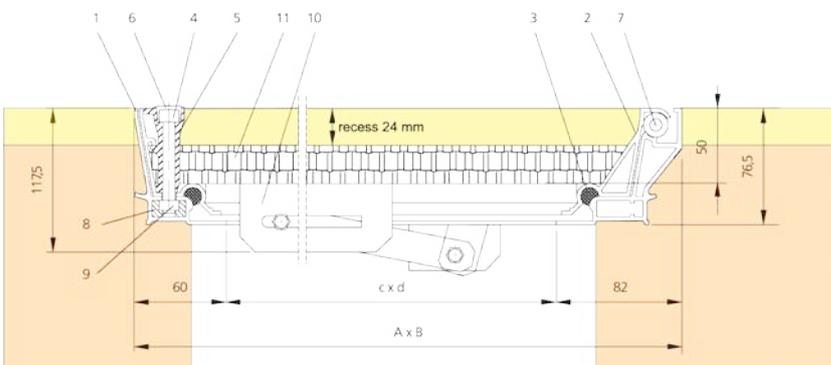

- | | |
|-------------------|---|
| 1 Frame | 7 Hinge |
| 2 Cover | 8 Injection-moulded part |
| 3 Seal | 9 Square boss |
| 4 Allen Screw | 10 Safety device |
| 5 Die-cast corner | 11 Aluminium honeycomb plate (with white coating) |
| 6 Plastic Cap | 12 Gas-lift struts |

Product Reference	Clear Opening	Outside Dimensions	Weight
	(≈ mm) c x d	(≈ mm) A x B	
SCCA - GD 66	600 x 600	720 x 740	13 kg
SCCA - GD 86	800 x 600	920 x 740	15 kg
SCCA - GD 88	800 x 800	920 x 940	18 kg
SCCA - GD 106	1000 x 600	1120 x 740	18 kg
SCCA - GD 108	1000 x 800	1120 x 940	20 kg
SCCA - GD 110	1000 x 1000	1120 x 1140	23 kg