



Loading Capacity: 15 kN test load (per EN124)

Materials: Frame made of extruded aluminium sections. Cover made of extruded aluminium sections with composite aluminium honeycomb plate (white coated). Stainless steel screws 2 EPDM seals.

Features: Modern lightweight-construction access cover. An unrestricted height of 14 mm is available for laying slabs, tiles or parquet flooring etc. Odour and waterproof access cover in high-quality finish. Pleasant visible edges. Unobtrusive corner joints ease the joining of tiles or slabs etc.

Lift Open System: SureCover SCLA-SL comes with a set of lifting keys and precise installation instructions. Jammed covers are released by simply turning the Brass Key provided.


Applications: AFor indoor access shafts (only accessible), which can be opened without applying excessive force.

Installation: Installation must be carried out according to instructions. With water-tight models, care must be taken to seal the outer frame into the surrounding flooring and to fill the cover with water-tight concrete.



Web Link:

<https://surespancovers.com/surecover>

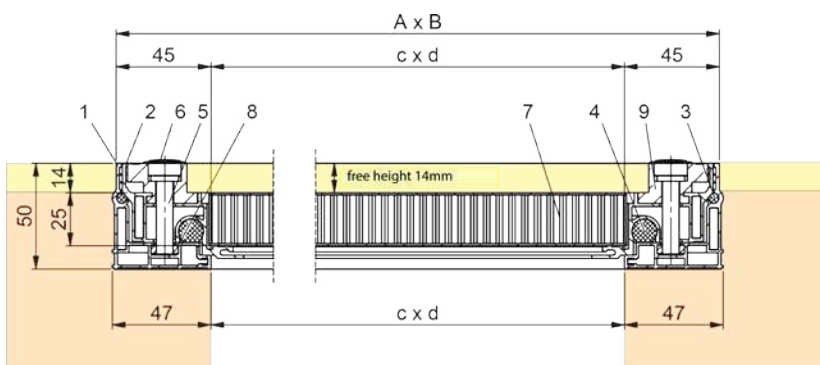

- 1 Frame
- 2 Cover
- 3 Top Seal
- 4 Bottom Seal
- 5 Allen screw (stainless steel)

- 6 Plastic cap
- 7 Aluminium honeycomb plate (white coated)
- 8 Nut (stainless steel)
- 9 Casting (aluminium)

Product Reference	Clear Opening	Outside Dimensions	Weight
	(≈ mm) c x d	(≈ mm) A x B	
SCLA - SL 22	200 x 200	290 x 290	2 kg
SCLA - SL 33	300 x 300	390 x 390	3 kg
SCLA - SL 44	400 x 400	490 x 490	5 kg
SCLA - SL 45	450 x 450	540 x 540	5 kg
SCLA - SL 55	500 x 500	590 x 590	6 kg
SCLA - SL 64	600 x 400	690 x 490	6 kg
SCLA - SL 66	600 x 600	690 x 690	8 kg
SCLA - SL 77	700 x 700	790 x 790	10 kg
SCLA - SL 86	800 x 600	890 x 690	10 kg
SCLA - SL 88	800 x 800	890 x 890	12 kg
SCLA - SL 106	1000 x 600	1090 x 690	12 kg
SCLA - SL 108	1000 x 800	1090 x 890	13 kg
SCLA - SL 110	1000 x 1000	1090 x 1090	16 kg