

Features

- Unique sliding design
- Thermally broken lid and upstand
- External curb liner
- 50mm polyisocyanurate board (0.43 W/m²K)
- European deadlock
- Any colour available



Standard Specification



Material

Cover and frame aluminium
50mm thermally broken composite lid and upstand.
Aluminium extrusion grade 6063T6
Aluminium sheet grade 1050

Cover

50mm fully insulated kerb and lid, corner welded and reinforced.

Upstand

220mm upstand with external curb liner.
Thermally broken with 50mm insulation and 120mm fixing flange.
Integral weathering lip.

Insulation

50mm Polyisocyanurate (PIR) insulation to 0.43 W/m²K U-value.

Seal

Double unbroken bubble & blade seal to lid.

Operation

Manual opening or
Electric Opening

Locking


Heavy duty stainless steel slam latch (LO1)
Internal hasp & staple for padlock (LO2)
External padlockable handle (LO4)
(Padlocks by others)
Hold open safety stay

Finish

Mill finish aluminium

Product Codes	Standard Sizes*	Weights
SLHP/60.60	600 x 600	36kg
SLHP/75.75	750 x 750	44kg
SLHP/75.90	750 x 900	49kg
SLHP/90.90	900 x 900	54kg
SLHP/100.100	1000 x 1000	60kg
SLHP/150.75	1500 x 750	70kg
SLHP/120.120	1200 x 1200	105kg

*Bespoke sizes available

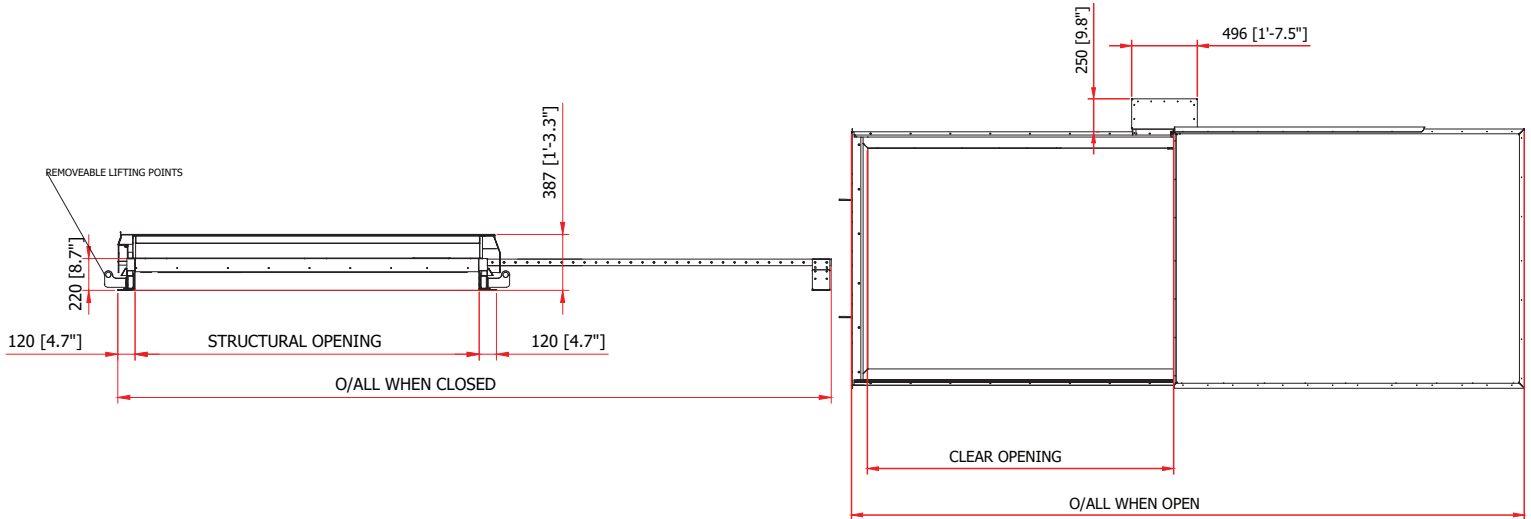

Options

Free of Charge:




Non-Combustible
Mineral Wool Insulation

Locking:



LO6 European
Deadlock. Int
Thumb Turn, Ext Key



LO7 European
Deadlock Int/Ext
Key Lock


Other Options:

- Electric Opening
- Fixed external rails for larger sizes
- Walk On Top
- Pitched Roof Installation
- Extended Cap & Flashing
- Single or twin polyester powder coating

Ladder-Up Post



Sureguard Handrail

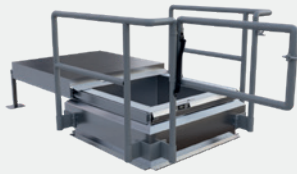

Fixed Handhold



Safety Grid



Ladder Arrangements

ZIP Retractable Ladders



[Roof Hatch + ZIP Ladder](#)

Fixed Vertical Ladders



[Roof Hatch + Vertical Ladder](#)

Companionway



[Roof Hatch + Companionway Ladder](#)