

ROOF HATCH SRHP/25



SRHP/25

Standard features
25mm PIR Insulation
0.78 W/m²K


25mm THERMAL BREAK

OPTIONAL:
25mm Non Combustible Mineral Wool Insulation
1.14 W/m²K

SRHP/25 PLANT ROOM ACCESS

Standard features

- Full 25mm Thermally broken sections for outstanding insulation
- Insulation U-Value 0.78 W/m²K
- Secure rigid aluminium weather tight construction
- Hatch designed to support a live load of 200 kg/m²
- LO1 Locking - stainless steel heavy duty Cablock (Non Locking)
- Heavy Duty Continuous Hinges
- Double Unbroken bubble and blade seals
- Gas spring assisted operation
- Hold open and closing stay



Surespan SRHP25 Aluminium access hatch incorporating a full 25mm thermally broken composite lid and upstand.



Secure Stay Hold Open Arm with smooth manual closing using grip handle.



Double Unbroken welded Seals



Optional External Curb to suit weathered upstand


INSULATION OPTIONS

25mm 0.78 W/m²K Polyisocyanurate Insulation
25mm 1.13 W/m²K Non-combustible Mineral Wool



ROOF HATCH SRHP/25

DETAILS AND OVERVIEW

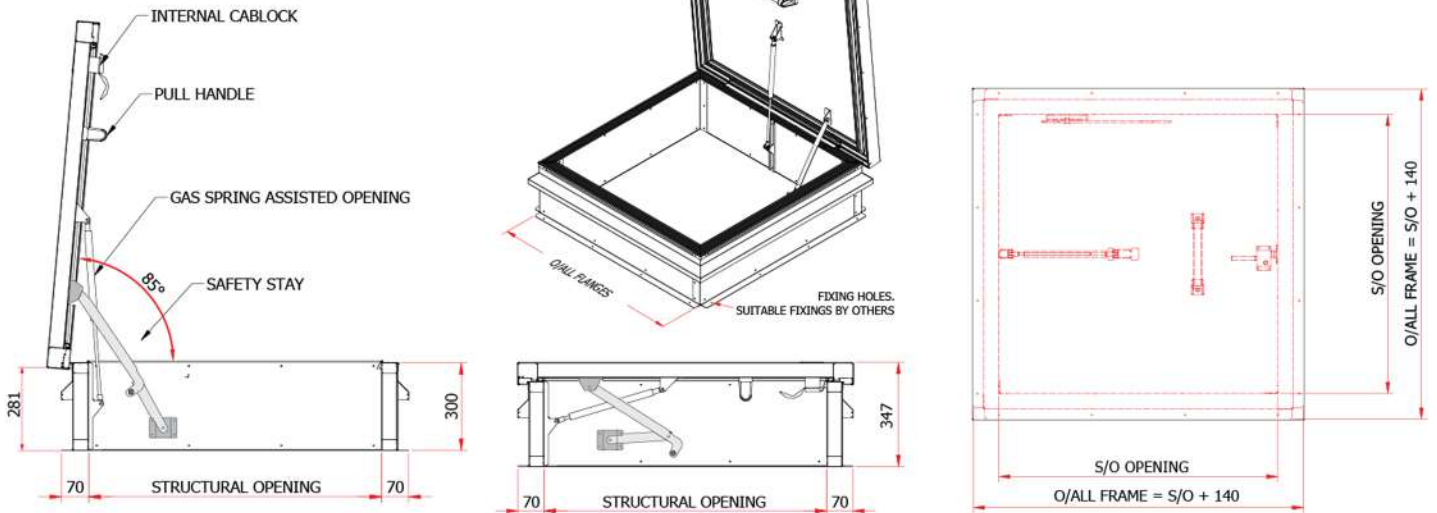

MATERIAL

Cover and frame 2mm aluminium with a full 25mm thermally broken composite lid and upstand.

COVER

25mm (1") fully insulated kerb and lid, corner welded and reinforced.

CURB

300mm (12") in height with external curb liner, 25mm thermal break and 25mm polyisocyanurate insulation to 0.78 W/m²K
Alternative 25 mm mineral wool insulation at no extra cost (1.13 W/m²K).

SEAL

Double unbroken bubble & blade seal to lid

OPERATION

Gas spring assisted manual opening, secure Stay Hold open arm with smooth manual closing using grip handle to prevent against accidental closure when engaged.

HINGES

Heavy duty continuous hidden hinge

LOCKING

Internal Slam Action Cablock

FINISH

Mill finish aluminium, single or two colour powder coating optional

STANDARD SIZES

WEIGHT	SIZES
28Kg	600 x 600
34Kg	750 x 750
38Kg	750 x 900
42Kg	900 x 900
47Kg	1000 x 1000
49Kg	1350 x 750

GUIDE TO REGULATIONS

BS EN 12207:2000	Air Permeability
BS EN 12208:2000	Water Tightness
BS EN 12210:2000	Wind Resistance
BS EN 1991-1	Snow Load
BS 8200	Impact Resistance
BS EN ISO 140	Acoustic Rated
BS EN 1627-1630	Security Features
BS EN ISO 6946	U-value achieved: 0.78 W/m ² K



ROOF HATCH SRHP/25

DETAILS AND OVERVIEW

Roof Access Hatch for SRHP25 from Surespan Ltd

Offering a full 25mm thermally broken composite lid and upstand. With 25mm insulation. Secure Hold arm with smooth manual closing using grip handle to prevent against accidental closure. Comes as standard with a curb liner, 300mm upstand, internal slam action cablock.

Manufacturer: Surespan Ltd. Leamore Close, Walsall, WS2 7NL.

Web: www.surespancovers.com. Tel: +44 (0)1922 711185. Product reference: SRHP25

Sizes

[600 x 600 mm].

[750 x 750 mm].

[750 x 900 mm].

[900 x 900 mm].

[1000 x 1000 mm].

[1350 x 750 mm].

Material:

[Aluminium].- Mill finish as standard.

Upstand:

[300 mm with a 25mm thermal break and insulated]. - Standard.

Colour/ Finish:

Internal:

[Not required].

[Polyester powder coating].

- Any RAL colour, insert requirements.

- External:

[Not required].

[Polyester powder coating].

- Any RAL colour, insert requirements.

Insulation Options:

[25 mm polyisocyanurate insulation (0.78 W/m²K)].

[25 mm Non-Combustible mineral wool insulation (1.13 W/m²K)].

Operation:

[Gas springs].

Accessories:

[None].

[Extended skirt liner]. - Used in conjunction with retractable ZIP ladder.

[Retractable ZIP ladder].

