

ROOF HATCH SRHP/75



SRHP/75

Standard features

75mm PIR Insulation

0.23 W/m²K

75mm THERMAL BREAK

OPTIONAL:

75mm **Non Combustible** Mineral Wool Insulation


0.43 W/m²K

SRHP/75 STANDARD HATCH

Standard features

- Full 75mm Thermally Broken sections
- Insulation U-Value 0.43 W/m²K fully insulated and energy efficient
- Secure rigid aluminium weather tight construction
- Hatch designed to support a live load of 200 kg/m²
- LO1 Locking - Stainless steel Cablock – (Other options available)
- Rw25dB acoustic rated
- Double unbroken seals
- Gas spring assisted operation
- Hold open stay
- Pull down handle
- Available in stock sizes detailed below
- Custom made to any size
- Predrilled holes in base flange

CUSTOM MADE TO ANY SIZE

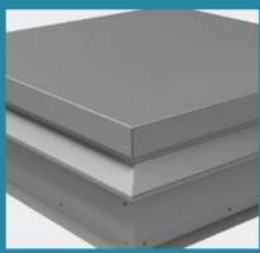

Surespan SRHP25 Aluminium access hatch incorporating a full 25mm thermally broken composite lid and upstand.



Secure Stay Hold Open Arm with smooth manual closing using grip handle.



Double Unbroken welded Seals



Optional External Curb to suit weathered upstand

INSULATION OPTIONS


75mm 0.27 W/m²K Polyisocyanurate Insulation

75mm 0.43 W/m²K Non-combustible Mineral Wool



ROOF HATCH SRHP/75

DETAILS AND OVERVIEW

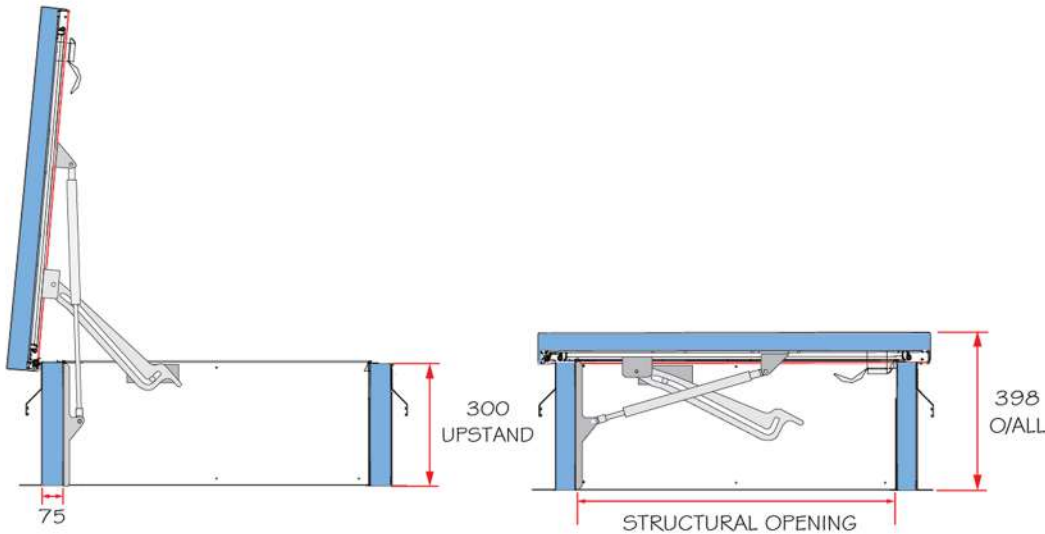

STANDARD SIZES

SIZE
600 x 600
600 x 900
750 x 750
750 x 900
900 x 900
1000 x 1000
750 x 1350
750 x 2450
BESPOKE SIZES AVAILABLE

MATERIAL

Cover and frame 2mm aluminium with a full 75mm thermally broken composite lid and upstand.

COVER

75mm (3") fully insulated kerb and lid, corner welded and reinforced.

CURB

300mm (12") in height with external curb liner, 75mm thermal break and 75mm insulation to 0.27 W/m²K U-value.

Alternative 75 mm mineral wool insulation at no extra cost (0.43 W/m²K).

SEAL

Double unbroken bubble & blade seal to lid

OPERATION

Gas spring assisted manual opening, secure Stay Hold open arm with smooth manual closing using grip handle to prevent against accidental closure.

HINGES

Heavy duty continuous hinge

LOCKING

Internal Slam Action Cablock

L06 ABS Euro Cylinder with external key locking and thumb turn options.

FINISH

Mill finish aluminium, single or two colour powder coating optional

SPECIFY L06 LOCKING OPTION

Specify L06 for High Security Locking Option on your Roof Hatch.



bsi.

ABS Euro Cylinder Anti-drill and Anti-Bump European Deadlock

GUIDE TO REGULATIONS

BS EN 12207:2000	Air Permeability
BS EN 12208:2000	Water Tightness
BS EN 12210:2000	Wind Resistance
BS EN 1991-1	Snow Load
BS 8200	Impact Resistance
BS EN ISO 140	Acoustic Rated
BS EN 1627-1630	Security Features
BS EN ISO 6946	U-value achieved: 0.27 W/m ² K



ROOF HATCH SRHP/75

DETAILS AND OVERVIEW

Roof Access Hatch for SRHP75 from Surespan Ltd

Offering a full 75mm thermally broken composite lid and upstand. With 75mm insulation. Comes as standard with a curb liner, 300mm upstand, internal slam action cablock

Manufacturer: Surespan Ltd. Leamore Close, Walsall, WS2 7NL.

Web: www.surespancovers.com. Tel: +44 (0)1922 711185. Product reference: SRHP50

Sizes

[600 x 600 mm].
 [600 x 900 mm].
 [750 x 750 mm].
 [750 x 900 mm].
 [900 x 900 mm].
 [1000 x 1000 mm].
 [750 x 1350 mm].
 [750 x 1500 mm].
 [750 x 2450 mm].

Material:

[Aluminium]. - Mill finish as standard.
 [Stainless Steel]. - Mill finish as standard.

Upstand:

[300 mm thermally broken and insulated]. - Standard.

Colour/ Finish:

Internal:
 [Not required].
 [Polyester powder coating].
 - Any RAL colour, insert requirements.
 - External:
 [Not required].
 [Polyester powder coating].
 - Any RAL colour, insert requirements.

Insulation Options:

[75 mm polyisocyanurate insulation (0.27 W/m²K)].
 [75 mm Non-Combustible mineral wool insulation (0.43 W/m²K)].

Operation:

[Gas springs].
 [24v DC Actuator]

Locking options:

[L01 Cablock]
 [L02 Cablock with hasp and staple]
 [L04 Cablock with external padlocking handle]
 [L06 ABS Euro Cylinder with external key locking and thumb turn options.]
 [L07 European deadlock with internal and external key operation]
 [L06 ABS Euro Cylinder with external key locking and thumb turn options].

Accessories:

[Extended skirt liner] - Used in conjunction with retractable ZIP ladder.
 [Fixed external handhold]
 [Retractable Handhold] - Retracts into the opening of the roof hatch
 [Retractable ZIP ladder] - To suit Floor to ceiling height up to 3.5m
 [SureGuard hand railing with self-closing gate] - Attached to the upstand of the hatch

