

VERTICAL ZIP8 WALL LADDER WALL ZIP



ZIP 8 OVERVIEW

Surespan ZIP 8 heavy duty retractable ladders are made to order to suit your floor to ceiling height. This unit comes complete, ready mounted to a wooden ceiling door within a 19mm thick wooden casing 240mm deep. Certified to EN 14975.

MATERIALS

Die cast aluminium alloy with insulated wooden trapdoor. Aluminium non-slip treads.

OPERATION

Counter balanced springs are incorporated into the pivot bracket for easy opening. Spring latch locked with operating pole.

LINING

The timber surround is 19mm thick and 240mm high.

TRAP DOOR

62mm insulated sandwich trapdoor underside finished in white.

TREADS

Standard tread width is 350mm by 140mm depth. Alternate sizes between 200mm - 380mm (140mm depth) and 430mm - 580mm (160mm depth) also available.

FIRE RATED


Available 30 minutes or 90 minutes Fire rated. This option has a 1.5mm steel frame and two 1.5mm sheet steel trapdoor. Infilled with 38mm or 75mm mineral wool depending on fire rating requirement.

LOADING

200Kg per tread. 500kg/m² overall structure.

OPTIONS

- | | |
|-----------------------------------|------------------------------------|
| Electric Operation
(See ZIP8E) | Fire Rating 30/
90 Minute |
| Telescopic handrail | Top operation -
Cable/Pull ring |
| Top Guardrail | Cylinder Lock |

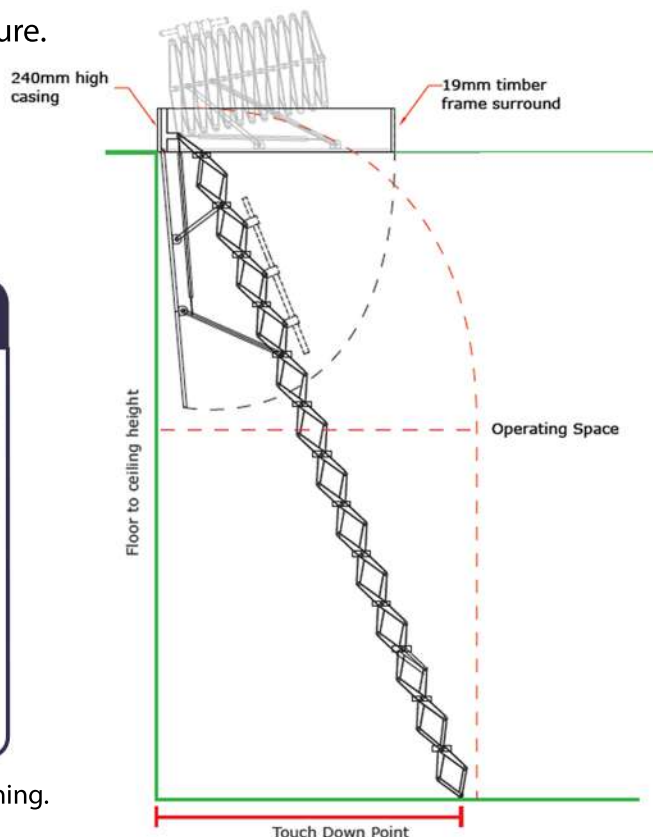

STANDARD SIZES

FLOOR TO CEILING HEIGHT	TOUCH DOWN POINT	OPERATING SPACE
2200 - 2500	1350 - 1200	1450
2501 - 2790	1450 - 1300	1550
2791 - 3090	1550 - 1440	1650
3091 - 3390	1660 - 1540	1770
3391 - 3690	1770 - 1640	1890
3691 - 3990	1880 - 1740	2010
3991 - 4300	1980 - 1830	2030

The floor to ceiling height will determine the length of the structural opening. Contact our sales department for more details.

