

# THERMALLY BROKEN SUPERIOR ROOF HATCH SRH/S20



## STANDARD

385 mm Fully insulated upstand

Superior insulation offers **0.20W/m<sup>2</sup>K**

Curb Liner included as standard

External in mill finish aluminium

Internal Cablock

## UL APPROVED





Surespan UL EU Approved SRHTBFR Fire rated roof hatches for up to 90 minutes.

## SRH/S20 OVERVIEW

The Surespan SRH/S20 Aluminium single leaf roof access hatch is thermally broken with 50mm superior insulation which offers a U-value of 0.20 W/m<sup>2</sup>K calculated to BS EN ISO 6946:2007.

The hatch also incorporates safety hold open stay to prevent against accidental closure.

The lid is held shut by slam action cablock

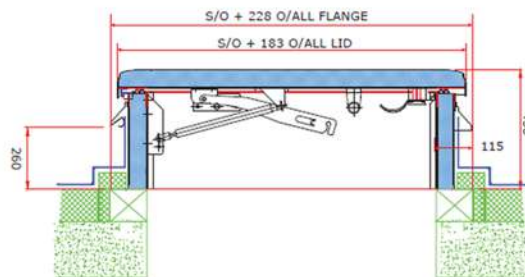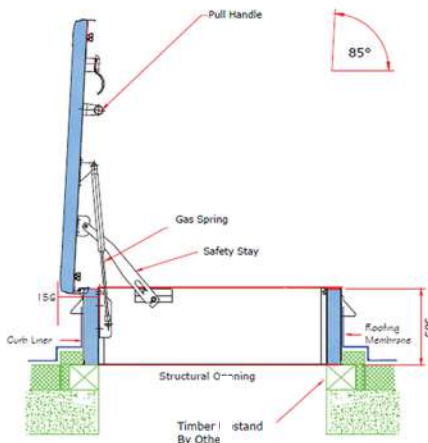

## STANDARD SIZES

MODEL	S/O
SRHP 60.60	600 x 600
SRHP 75.75	750 x 750
SRHP 90.75	900 x 750
SRHP 90.90	900 x 900
SRHP 100.100	1000 x 1000
SRHP 75.150	750 x 1500
SRHP 120.120	1200 x 1200
SRHP 75.250	750 x 2500
SRHP 75.330	750 x 3300

### MATERIAL

Aluminium extrusions in 6063 -T6.  
Sheet aluminium where used will be 1050 H14.

### COVER

The thermally broken lid incorporates a sandwich of 50mm superior insulation which offers a U-value of 0.20 W/m<sup>2</sup>K.

### LOCKING

The lid is held shut by a heavy duty grade 316 stainless steel Cablock. Other locking options are available upon request.

### UPSTAND

385mm upstand is filled with 50mm superior insulation

### OPERATION

Complete with gas spring assisted opening to ensure minimum amount of effort to open the double skinned aluminium lid. The lid will have the provision to lock in the open position with a safety hold open stay to prevent against accidental closure.

### FINISH

External finished in mill finish aluminium  
Internal & External powder coating can be requested to any RAL Colour.  
Also available as stainless steel.

