


SHIPS TYPE ACCESS LADDER SHP



LADDER SPECIFICATIONS SHP

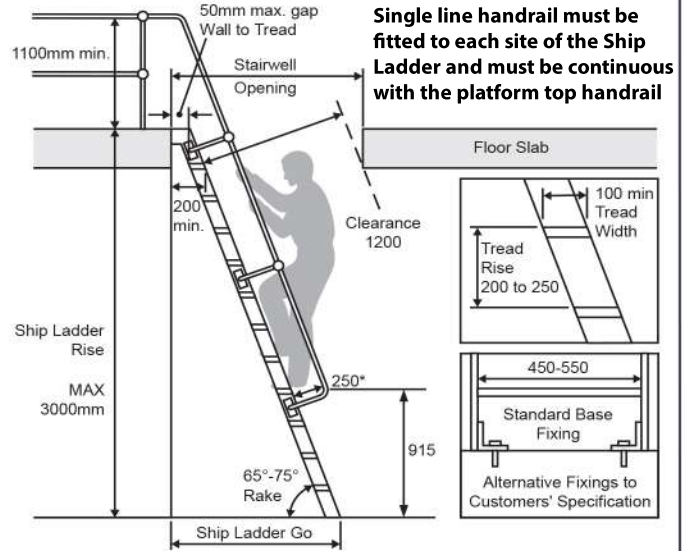


Single line handrail must be fitted to each side of the Ship Ladder and must be continuous with the platform top handrail


Min dimension between handrails 540mm
 Rise 225mm to 255mm
 Tread 100mm min. wide
 *Handrail 250mm for 65°
 100mm for 75°

LADDER SPECIFICATION SHP

SHP/S

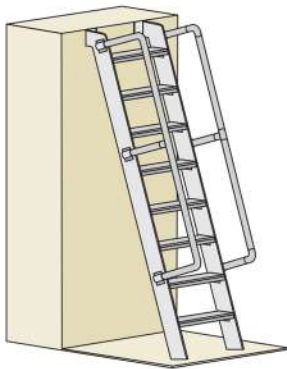

SHP/RP

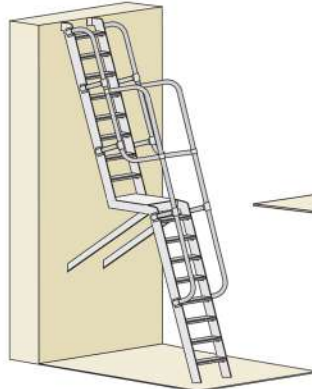


SHP/UO




SHP/DL




SHP/H

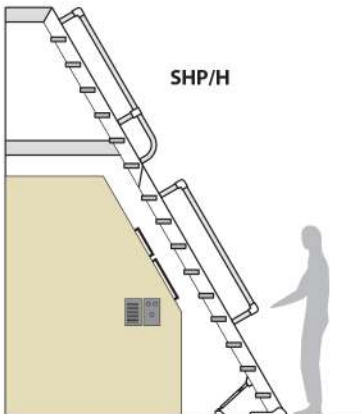

SHP/H

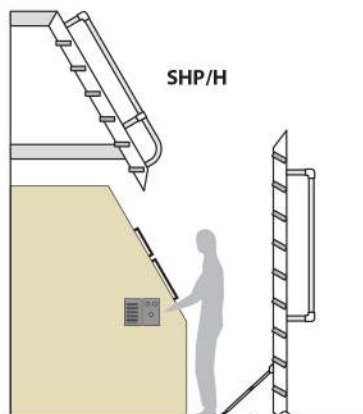


SHP/FAL - Fold away ladder

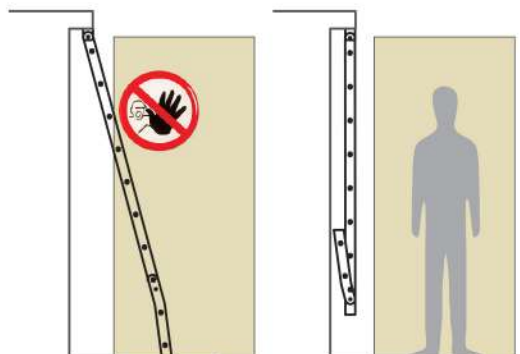


SHIPS TYPE ACCESS LADDER SHP

SHIPS LADDER HEADROOM CLEARANCE WITH DIFFERENT FLOOR DEPTHS

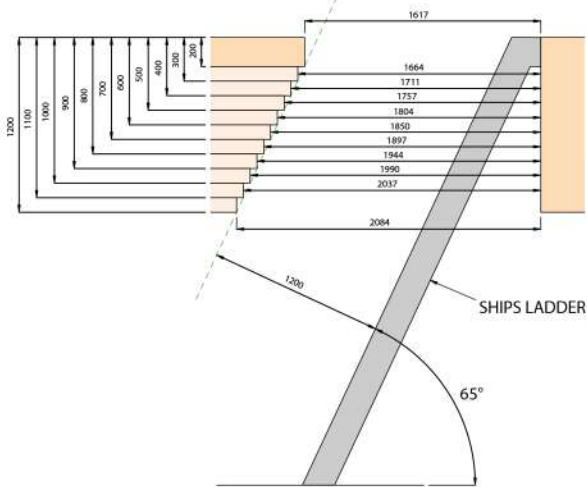

SURESPAN SHIPS LADDERS CAN BE DESIGNED AND SUPPLIED IN CONJUNCTION WITH A TOP OPENING ROOF HATCH WITH SIDE DOOR.

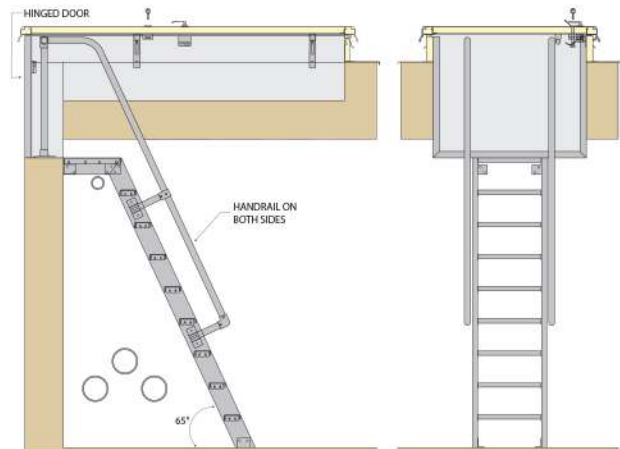

MATERIAL

Aluminium.

MANUFACTURE

Manufactured from 1400mm x 40mm channel stringers set 500mm apart.

TREADS

Chequer plate treads 500mm long x 100mm wide and set at approx 250mm centres.

FINISH

The ladder comes self colour as standard with polyester powder coating to any standard stocked RAL colour an additional option.

NOTE

All Surespan access ladders are designed in accordance with BS EN ISO 14122-1:2016 and comply with relevant building Regulations.

LADDER ANGLE SPECIFICATION

75° - 90°	FIXED ACCESS
65° - 75°	SHP SHIP LADDERS
50° - 65°	DANGER TO BE AVOIDED
30° - 50°	STAIRCASES
15° - 30°	TO BE AVOIDED
0° - 15°	RAMPS

