ZIP8 RETRACTABLE LADDER DATA SHEET



Features

- Deep and wide anti-slip treads
- Couterbalance spring action
- Mounted to a wooden trap ceiling door
- 19mm thick wooden casing 240mm deep
- Maximum loading 200kg/tread
- Certified to EN14975
- One side telescopic handrail
- Bespoke sizes available

MADE IN THE UK

Specification

Material

Die cast aluminium alloy with insulated wooden trapdoor. Aluminium non-slip treads

Operation

Counter balanced springs are incorporated into the pivot bracket for easy opening. Spring latch locked with operating pole.

Fire Rated

Available 30 minutes or 90 minutes fire rated. This option has 1.5mm steel frame and two 1.5mm sheet steel trapdoor. Infilled with 38mm or 75mm mineral wool depending on fire rating requirement.

Trap Doors

62mm insulated sandwich trapdoor underside finished in white.

Treads

Standard tread width is 350mm by 140mm depth. Alternate sizes are also available upon request.

Loading

200kg per tread. 500kg/m2 overall structure.

Options

See options tab for more information about optional features.

Lining

The timber surround is 19mm thick and 240mm high.


Floor to Ceiling Height	No. of Treads	Casing Length	Casing Width
2500mm	9 Treads	800 - 1600mm	675 - 1200mm
2500 - 2790mm	10 Treads	800 - 1600mm	675 - 1200mm
2791 - 3090mm	11 Treads	900 - 1600mm	675 - 1200mm
3091 - 3390mm	12 Treads	1000 - 1600mm	675 - 1200mm
3391 - 3690mm	13 Treads	1300 - 1600mm	675 - 1200mm
3691 - 3990mm	14 Treads	1400 - 1600mm	675 - 1200mm
3991 - 4300mm	15 Treads	1500 - 1600mm	675 - 1200mm
4301 - 4600mm	16 Treads	1600mm	800 - 1200mm




Walsall Rd, Aldridge, Walsall WS9 0SW


T: +44 (0)1922 711185
F: +44 (0)1922 714099
E: sales@surespancovers.com

REV 1.0 - RFCH - 04/21

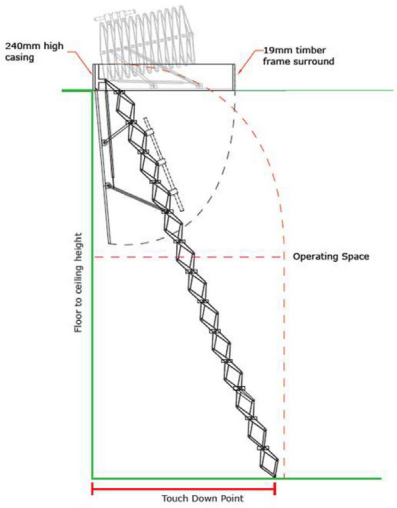

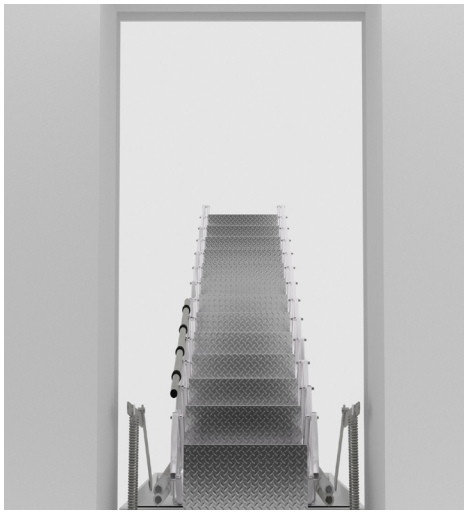

ZIP 8 OPERATING DIMENSIONS

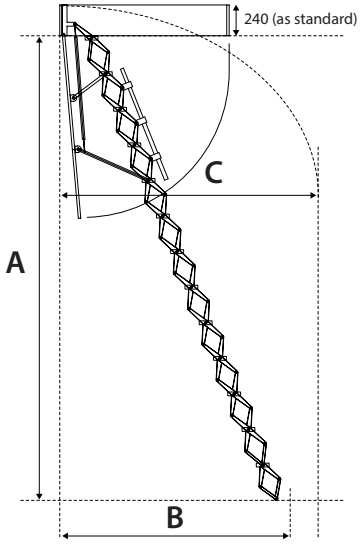

A FLOOR TO CEILING HEIGHT (mm)	B TOUCH DOWN POINT (mm)	C OPERATING SPACE (mm)
2200 - 2500	1350 - 1200	1450
2500 - 2790	1450 - 1300	1550
2791 - 3090	1550 - 1440	1650
3091 - 3390	1660 - 1540	1770
3391 - 3690	1770 - 1640	1890
3691 - 3990	1880 - 1740	2010
3991 - 4300	1980 - 1830	2030

The floor to ceiling height will determine the length of the structural opening. Contact our sales department for more details.

Walsall Rd, Aldridge, Walsall WS9 0SW

T: +44 (0)1922 711185
F: +44 (0)1922 714099
E: sales@surespancovers.com